

ARGA[®]
SAFETY

**The Safest
Way of
Working at Height**



2025 - 2026



argasafety.com

ARGA® SAFETY The Safest Way of Working at Height



**FALL PROTECTION ANCHORAGES RETRACTABLE FALL ARRESTERS
WORKING AT HEIGHT LIFE LINE DAVIT ARMS CARABINERS
FALL PROTECTION EQUIPMENT HARNESSSES
VERTICAL LIFE LINE PULLEYS**

With years of expertise in the working-at-height sector, ARGA SAFETY excels in producing and implementing tailored systems and engineering solutions designed to ensure the safe execution of elevated tasks. As a distinguished manufacturer of fall arrest equipment, we are committed to delivering straightforward yet intelligent solutions that prioritize quality, safety, and employee comfort. Our focus extends to designing, manufacturing, and installing cutting-edge work-at-height (Fall Arrest) and rescue equipment across a spectrum of industries, including energy, telecommunications, defense, fuel, and construction. ARGA SAFETY's dedication to comprehensive safety solutions empowers workers to perform their duties confidently and securely in any environment. Through continuous innovation and a steadfast commitment to excellence, ARGA SAFETY remains a leader in fall protection technology. Our simple, smart solutions are engineered to enhance safety and efficiency, ensuring peace of mind for individuals working at heights across various sectors of life.

Our Integrated Management System Policy

As ARGA SAFETY, a leading provider of working at height and personal protective equipment dedicated to occupational health and safety, our policy is:

To conduct our operations in an environmentally responsible manner while prioritizing customer satisfaction. Our focus is on continual improvement across all facets of our business, ensuring a safe working environment for our valued employees.

In addition

- * Adopting the philosophy of continuous development to make quality and desired quality products the first time without any defects,
- * Efficient use of all resources, including natural resources,
- * To act with the awareness of protecting the environment and nature and to prevent environmental pollution,
- * To take the creation of environments suitable for the health and occupational safety of our employees as a basis by keeping the value of human beings at the highest level, to carry out the necessary work to prevent occupational accidents and occupational diseases,
- * To meet the applicable legal requirements and compliance obligations related to the activities of our organization, to make arrangements in our management system to meet these requirements, taking into account the needs and expectations of the relevant parties,
- * To meet the requirements of the Personal Protective Equipment Regulation 2016/425/EU,
- * And to maintain and continuously improve all these activities with our Integrated Management System.

Vision

To be the first company that comes to mind in its sector.

Mission

To be a company that will contribute to the development of society with our expertise by establishing continuous and sustainable relationships with our customers by using the world's highest quality and most innovative products in the fields of working at height, occupational health, and safety.

Our Values

- * Reliability
- * Contemporary
- * Fair
- * Customer-orientation
- * Quality
- * Continuous development and change
- * Social responsibility awareness



OUR PRODUCTION SYSTEMS

PRODUCTION



INSTALLATION



QUALITY CONTROL



WAREHOUSE



ABCDEF OF WORKING AT HEIGHT

**A**

ANCHORAGES

Safe anchorage point. It is a safety point located or installed in buildings to which the worker attaches himself against falling. (Lifelines, tripods, anchors, etc.)

**B**

BODY SUPPORT / HARNESSES

Covers the body, shoulders, waist and legs and distributes the fall load equally to the body in case of a possible fall. Provides an attachment point for personal fall arrest systems above the worker. (Fall Arrest Harnesses)

**C**

CONNECTORS

These are systems that connect the user to the anchor point with a safety harness. For Example: Shock Absorbing Lanyards, Carabiners, Personal Retractable Fall Arresters.

**D**

RESCUE AND DESCENT DEVICES

Rescue and Descent devices are used for lowering or lifting a person who has fallen and/or suspended, or in confined spaces.

**E**

TRAINING



It is mandatory to receive training from authorized persons for the correct use of fall arrest systems. There are different or general working at height training programs specific to many fields of work.

**F**



FALL PROTECTION EQUIPMENT

They help prevent employees' equipment from falling while working at heights and provide a more productive working environment.



CALCULATION OF CRITICAL FALL HEIGHT

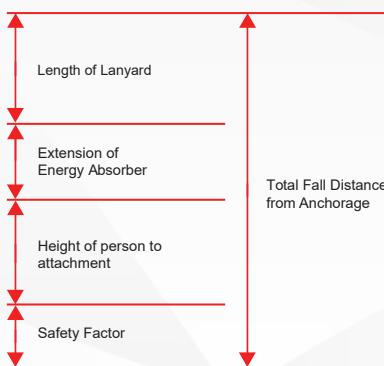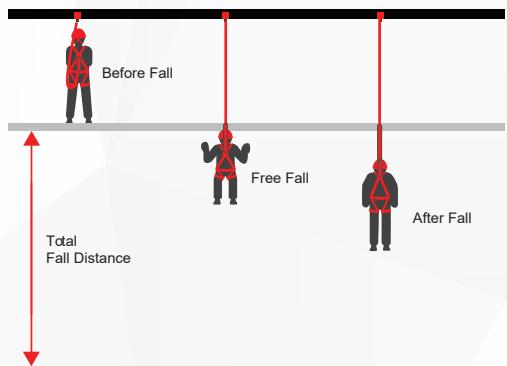

1 Anchorage point above user's head level – Fall Factor 0

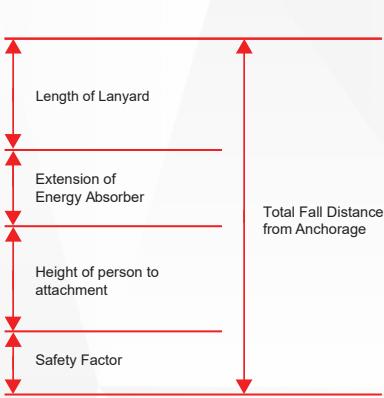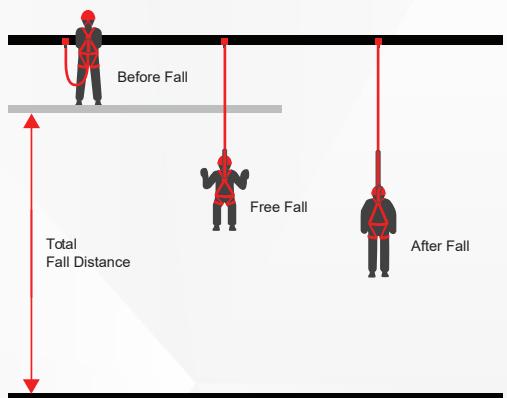

2 Anchorage point at user's back level – Fall Factor 1

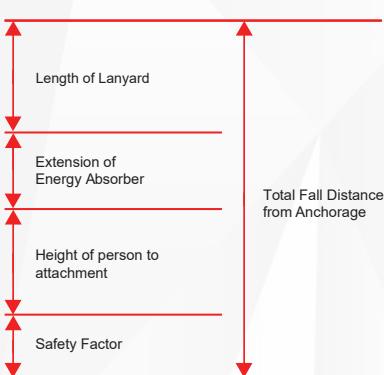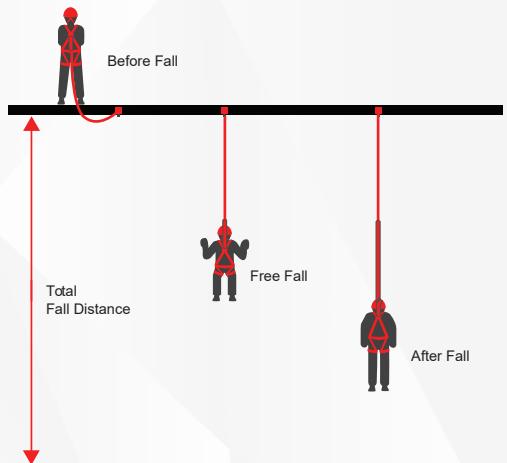

3 Anchorage point at user's foot level – Fall Factor 2

Choosing the appropriate Safety Harness, Shock Absorbing Lanyard, Carabiner, and Anchorage point in the work area is as important as knowing how to calculate the Total Clear Fall Height. When calculating the Total Open Fall Height; The location of the anchor point, the length of the shock absorbing lanyard, the length of the shock absorbing lanyard after the fall, the height of the user to the anchorage point and the safety distance (usually 1m).

The total fall distance varies depending on the user's anchorage point and location before the fall occurs, provided that the person's position is taken into account. This ratio is known as the Fall Factor and greatly affects the free fall distance (period of fall acceleration), which leads to defining the "severity" of the potential fall.

In summary:

- * The higher the fall factor, the higher the total fall distance.
- * The longer the length of the Shock Absorbing Lanyard, the higher the total fall distance.

ESSENTIAL STANDARDS

EN 363:2018	Personal fall protection systems	
EN 364:1992	Test Methods	
EN 364:2004/AC:2006	General rules regarding operating instructions, maintenance, periodic inspection, repair, marking and packaging	
EN 1868:1997 EQV	List of equivalent terms	

ANCHORAGES AND LIFELINES

EN 353-1:2014 +A1:2017	Guided type fall arresters with rigid anchor line	CE
EN 353-2:2002	Guided type fall arrester incorporating a flexible anchor rope	CE
EN 795:2012 Tip A	Anchor devices (Fixed Anchors) (1 User)	CE
EN 795:2012 Tip B	Anchor devices (Mobile Anchors) (1 User)	CE
EN 795:2012 Tip C	Anchor devices (Fixed Horizontal Lifelines) (1 User)	
EN 795:2012 Tip D	Anchor devices (Rail Lifelines) (1 User)	
EN 795:2012 Tip E	Anchor devices (Weighted Anchors) (1 User)	CE
CEN/TS 16415:2013	Anchor devices - Recommendations for anchor devices intended for simultaneous use by more than one person (Type A, Type B, Type C, Type D, Type E)	

SAFETY HARNESSSES

EN 361:2002	Full Body Harness Systems	CE
EN 358:2018	Work Positioning Harnesses and Ropes	CE
EN 813:2008	Seat Harnesses	CE
EN 1497:2007	Rescue Harnesses	CE
EN 1498: 2006	Rescue Rings	

SHOCK ABSORBING LANYARDS & CARABINERS

EN 355: 2022	Energy Absorbers	CE
RFU11.074 AT	Shock Absorbers - Horizontal use (Sharp edge use)	CE
EN 354:2010	Lashing device against falling from a certain height	CE
EN 362:2004	Connectors (Carabiners)	CE

RETRACTABLE FALL ARRESTERS AND RESCUE DEVICES

EN 360:2002	Retractable type fall arresters	CE
EN 341:2011	Descender devices for rescue	CE
EN 1496:2017	Rescue Lifting Devices	

HEAD PROTECTION

EN 397:2012+A1:2012	Industrial Safety Helmets	CE
EN 12492:2012	Helmets for mountaineers - Safety rules and test methods	CE
EN 50365:2002	Insulating helmets for use on low voltage installations	CE

ROPES

EN 1891: 1998	Low stretch Textile Ropes (Static Ropes)	CE
---------------	--	----

CATEGORIES OF WORKING AT HEIGHT



ANCHORAGES



TRIPODS



SHOCK ABSORBING LANYARDS



RETRACTABLE FALL ARRESTERS



HELMETS



ROPES



CARABINERS



RESCUE DEVICES



PULLEYS



BAGS



CONSOLE ARMS



SAFETY HARNESS



FALL ARREST
(BACK D RING)



SPACE LIMITATION
(BACK D RING)



FALL ARREST
(CHEST D RING)



ROPE ACCESS
(BACK AND CHEST D RING,
SEATED WORK,
ABDOMINAL D RING)



POSITIONIN
(WAIST RINGS)



HORIZONTAL USE
SHARP EDGE CONFORMITY
(FOR HORIZONTAL USE
SHARP EDGE FEATURE)



SEATED WORKING



FLAME - ARC RESISTANT



100 Kg
100 KG WORKING CAPACITY



150 Kg
150 KG WORKING CAPACITY



300 Kg
300 KG WORKING CAPACITY



DIRECTIVE 2016/425
MODULE D
QUALITY MANAGEMENT SYSTEM



DIRECTIVE 2016/425
MODULE B
CE TYPE APPROVAL CERTIFICATE



LIFELINE 8 USERS



LIFELINE
30 METERS INTERMEDIATE
OPENING



PRODUCT LIABILITY INSURANCE



RODUCT LIFETIME
GUARANTEE



316 SS
316 GRADE STAINLESS STEEL

INDEX



HORIZONTAL
LIFELINE

1 | 10-25



VERTICAL
LIFELINE

2 | 26-31



TRIPODS

3 | 32-45



CONSOLE ARMS

4 | 46-51



ANCHORAGES

5 | 52-57



SAFETY
HARNESS

6 | 58-83



SHOCK
ABSORBING
LANYARDS

7 | 84-95



CARABINERS

8 | 96-101



RETRACTABLE
FALL ARRESTERS

9 | 102-105



RESCUE DEVICES

10 | 106-109



HELMETS

11 | 110-113



PULLEYS

12 | 114-115



ROPES

13 | 116-119



BAGS

14 | 120-123

HORIZONTAL LIFELINE




ARGA[®]
SAFETY

The Safest
Way of
Working at Height

 argasafety.com

ARON

Permanent Horizontal Lifeline (8 People)

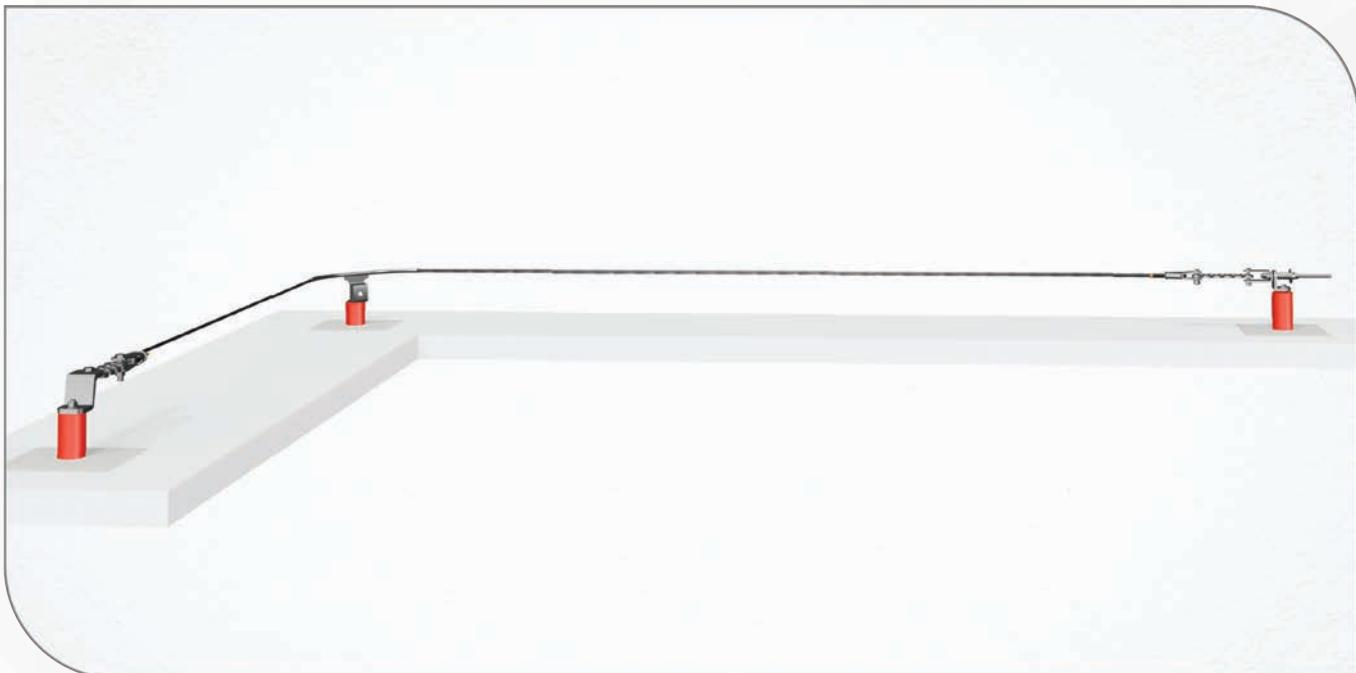

Technical Specifications

ARON Fixed - Permanent Horizontal Lifelines are one of the types of fixed anchors and are designed and manufactured to ensure that employees work safely during all kinds of construction, maintenance, repair, assembly, disassembly works such as gutter cleaning, skylight cleaning, installation of roofing materials, installation of solar panels, overhead cranes, gantry cranes, crane walkways, work on machinery and work on vehicles.

- * It is suitable for use of 8 users at the same on the line.
- * All components of the lifeline are made of weldless stainless steel and covered by a lifetime warranty against manufacturing defects.
- * Assembly is done with bolts and nuts. Welded assembly is preferred when there is no other solution.
- * It has an indicator system so the tension of the line can be controlled.
- * The shock absorber system is made of steel and is not affected by sunlight and ambient temperature. Shock absorber absorbs the energy after a fall and reduces the force on the structure.
- * The A5 carriage has a roller feature with a closed bearing system and runs without snagging along the line. With the help of A5 Carriage, it can be connected to or disconnected from the line at any desired point of the line.
- * A5 Carriage does not need carabiner for locking system. Tested and certified with all mounting types (floor/wall/overhead).



MODULE D QUALITY
CERTIFICATE



PRODUCT
LIABILITY
INSURANCE



CERTIFICATE.
EN 795:2012 Type C,
CEN/TS 16415:2013



LIFETIME
GUARANTEE



2- 30 MT
INTERMEDIATE
OPENING



8 USERS



SUITABILITY
FOR DIFFERENT
STRUCTURAL
ANCHORS



STAINLESS
STEEL

ARON

Fixed Horizontal Lifeline (8 People)



WALL - 40 MAIN BRACKET

It is made of stainless-steel material and its surface is polished. It is the first specially designed anchor used at the beginning of the line.



ARROW- 60 TENSIONING AND INDICATOR

It is made of stainless-steel material and its surface is polished. The indicator on the system provides information about changes that may occur due to seasonal hot and cold differences on the line in case of a possible fall.



STATION- 50 TERMINATION

It is made of stainless-steel material and its surface is polished. It is used at both ends of the lifeline to terminate the lifeline.



SNAKE -10 SHOCK ABSORBER

It is made of stainless-steel material and its surface is polished. It absorbs the energy generated by a fall on the lifeline and is used at both ends of the line.



BRIDGE -30 INTERMEDIATE BRACKET

It is made of stainless-steel material and its surface is polished. It has a special design that allows the user to work safely by moving forward without leaving the line, which can be used on lines longer than 30 meters.



EDGE-90 CORNER BRACKET

It is made of stainless-steel material and its surface is polished. It has a special design that allows the user to work safely by moving forward without leaving the line, which can be used at corner turns.



CASTLE - 20 MAIN BRACKET

It is made of stainless-steel material and its surface is polished. It is a specially designed final anchor used at the end of the line.



LINE -8 LIFELINE ROPE


Made of 7x19 construction stainless steel. It has a strength of 40 kN. It is used along the line as a lifeline.



A5 CARRIAGE (GLIDER)


Made of stainless steel, surface polished and specially painted. Thanks to its specially designed roller bearings, it provides ease and comfort to the user in all floors, wall and overhead lines. Thanks to the special lock system independent from the carabiner, it provides easy entry and exit from every point of the line.

USING A5 CARRIAGE /GLIDER

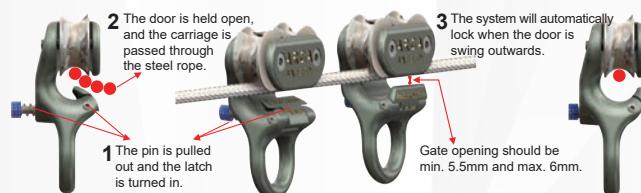


ARON

Fixed Horizontal Lifeline (8 People) - Concrete Floor Mounting with Strut

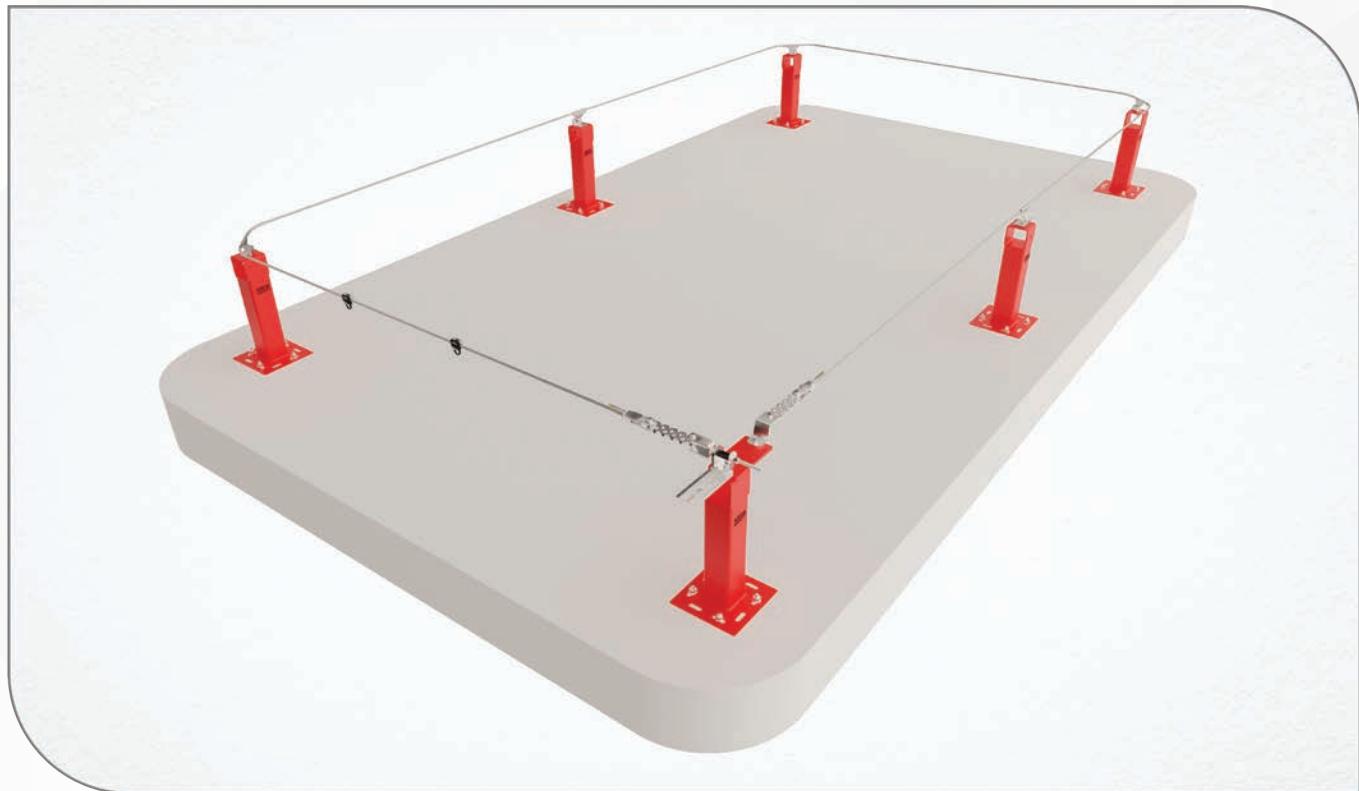

ARON

Fixed Horizontal Lifeline (8 People) – Installation on Membrane Floor

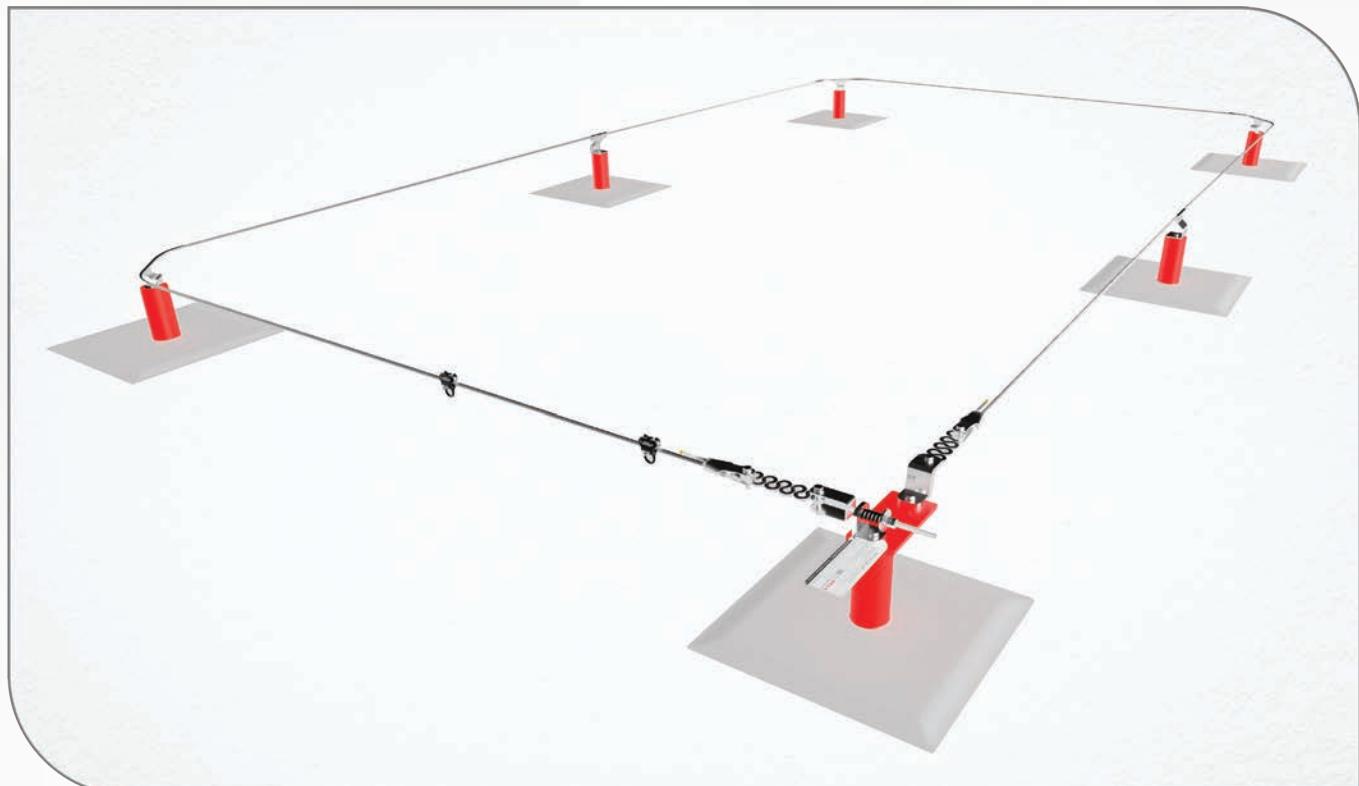


ARON

Fixed Horizontal Lifeline (8 People) – Installation on Sheet Metal Floor (Sandwich, Trapezoidal Roof)





ARON

Fixed Horizontal Lifeline (8 People) – Installation on Sheet Metal Floor (Seam Roof)

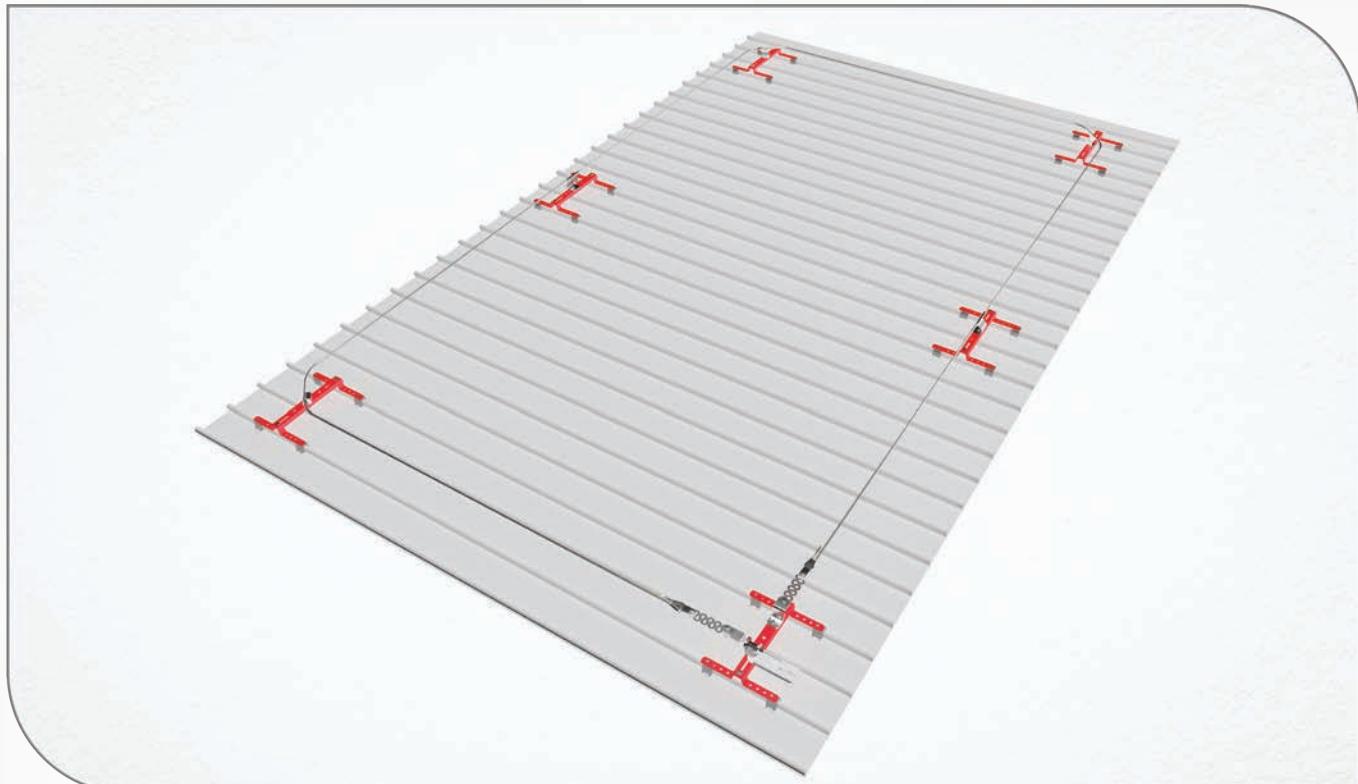




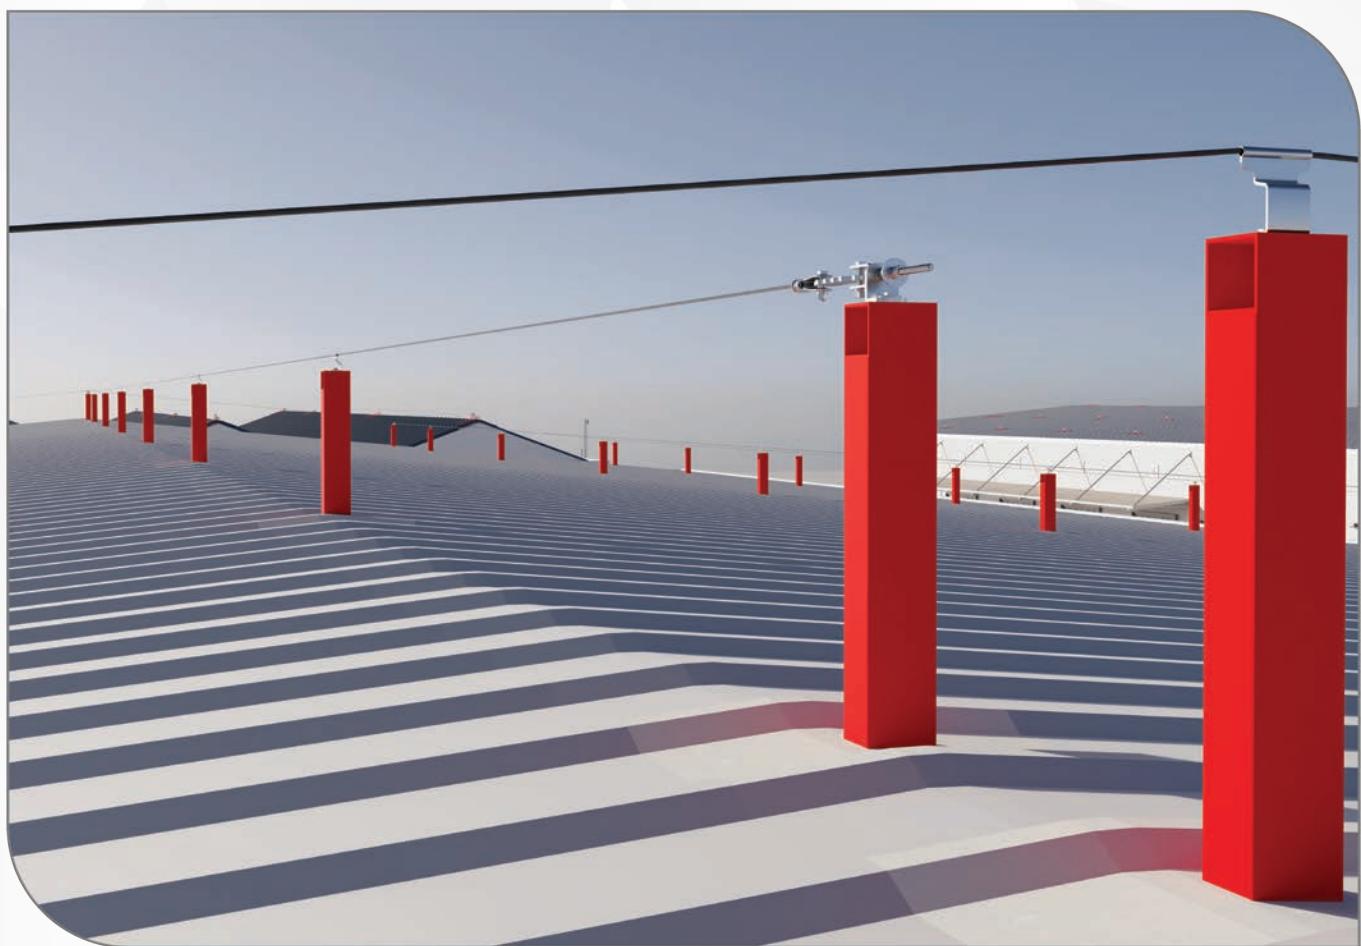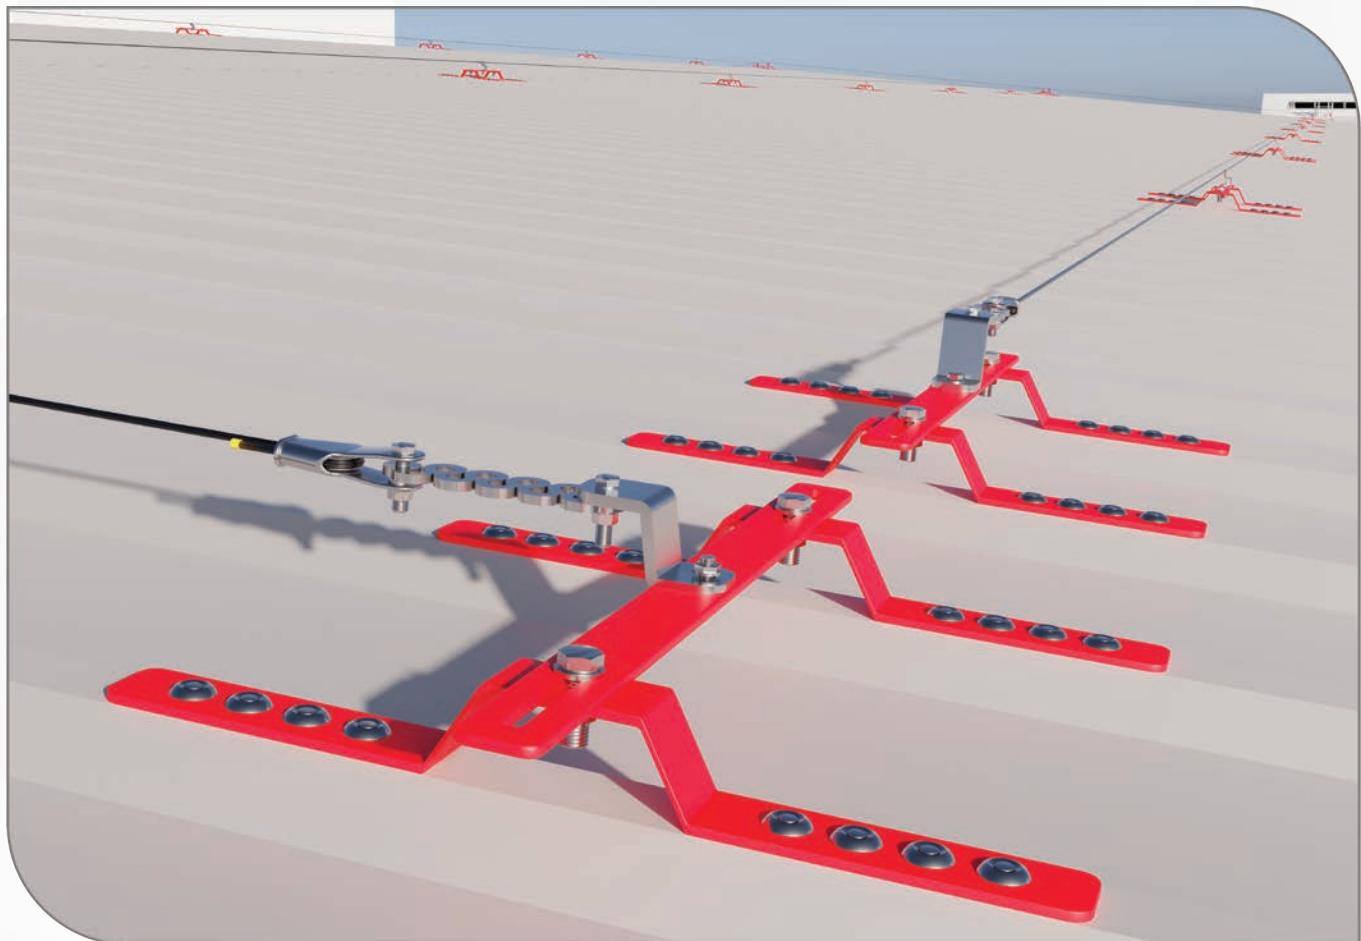



Ordering Information


Product Name			Standard	
Stock Code	Stock Name	Stock Description	EN 795:2012 Tip C	CEN/TS 16415:2013 Tip C
ARHL0010	WALL 40	Main Anchor		
ARHL0020	ARROW 60	Turnbuckle & Indicator		
ARHL0030	STATION 50	Terminator		
ARHL0040	SNAKE 10	Shock Absorber		
ARHL0050	BRIDGE 30	Intermediate Anchor		
ARHL0060	EDGE 90	Corner Anchor 90 degree		
ARHL0070	CASTLE 20	Last Main Anchor		
ARHL0080	LINE 8	Lifeline Rope 7x19 Stainless Steel		
ARHL0090	A5	Carriage/Glider		
ARHL0010	ARON	ARON Fixed Horizontal Lifeline 10 mt	✓	✓
ARHL0020	ARON	ARON Fixed Horizontal Lifeline 20 mt	✓	✓
ARHL0030	ARON	ARON Fixed Horizontal Lifeline 30 mt	✓	✓
ARHL0040	ARON	ARON Fixed Horizontal Lifeline 40 mt	✓	✓
ARHL0050	ARON	ARON Fixed Horizontal Lifeline 50 mt	✓	✓
ARHL0060	ARON	ARON Fixed Horizontal Lifeline 60 mt	✓	✓
ARHL0070	ARON	ARON Fixed Horizontal Lifeline 70 mt	✓	✓
ARHL0080	ARON	ARON Fixed Horizontal Lifeline 80 mt	✓	✓
ARHL0090	ARON	ARON Fixed Horizontal Lifeline 90 mt	✓	✓
ARHLP0010	ARON	ARON Fixed Horizontal Lifeline (Strut) 10 mt	✓	✓
ARHLP0020	ARON	ARON Fixed Horizontal Lifeline (Strut) 20 mt	✓	✓
ARHLP0030	ARON	ARON Fixed Horizontal Lifeline (Strut) 30 mt	✓	✓
ARHLP0040	ARON	ARON Fixed Horizontal Lifeline (Strut) 40 mt	✓	✓
ARHLP0050	ARON	ARON Fixed Horizontal Lifeline (Strut) 50 mt	✓	✓
ARHLP0060	ARON	ARON Fixed Horizontal Lifeline (Strut) 60 mt	✓	✓
ARHLP0070	ARON	ARON Fixed Horizontal Lifeline (Strut) 70 mt	✓	✓
ARHLP0080	ARON	ARON Fixed Horizontal Lifeline (Strut) 80 mt	✓	✓
ARHLP0090	ARON	ARON Fixed Horizontal Lifeline (Strut) 90 mt	✓	✓
ARHLR0010	ARON	ARON Fixed Horizontal Lifeline (Riveted) 10 mt	✓	✓
ARHLR0020	ARON	ARON Fixed Horizontal Lifeline (Riveted) 20 mt	✓	✓
ARHLR0030	ARON	ARON Fixed Horizontal Lifeline (Riveted) 30 mt	✓	✓
ARHLR0040	ARON	ARON Fixed Horizontal Lifeline (Riveted) 40 mt	✓	✓
ARHLR0050	ARON	ARON Fixed Horizontal Lifeline (Riveted) 50 mt	✓	✓
ARHLR0060	ARON	ARON Fixed Horizontal Lifeline (Riveted) 60 mt	✓	✓
ARHLR0070	ARON	ARON Fixed Horizontal Lifeline (Riveted) 70 mt	✓	✓
ARHLR0080	ARON	ARON Fixed Horizontal Lifeline (Riveted) 80 mt	✓	✓
ARHLR0090	ARON	ARON Fixed Horizontal Lifeline (Riveted) 90 mt	✓	✓
ARHLC0010	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 10 mt	✓	✓
ARHLC0020	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 20 mt	✓	✓
ARHLC0030	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 30 mt	✓	✓
ARHLC0040	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 40 mt	✓	✓
ARHLC0050	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 50 mt	✓	✓
ARHLC0060	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 60 mt	✓	✓
ARHLC0070	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 70 mt	✓	✓
ARHLC0080	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 80 mt	✓	✓
ARHLC0090	ARON	ARON Fixed Horizontal Lifeline (Seam Roof) 90 mt	✓	✓
ARHLM0010	ARON	ARON Fixed Horizontal Lifeline (Membrane) 10 mt	✓	✓
ARHLM0020	ARON	ARON Fixed Horizontal Lifeline (Membrane) 20 mt	✓	✓
ARHLM0030	ARON	ARON Fixed Horizontal Lifeline (Membrane) 30 mt	✓	✓
ARHLM0040	ARON	ARON Fixed Horizontal Lifeline (Membrane) 40 mt	✓	✓
ARHLM0050	ARON	ARON Fixed Horizontal Lifeline (Membrane) 50 mt	✓	✓
ARHLM0060	ARON	ARON Fixed Horizontal Lifeline (Membrane) 60 mt	✓	✓
ARHLM0070	ARON	ARON Fixed Horizontal Lifeline (Membrane) 70 mt	✓	✓
ARHLC0080	ARON	ARON Fixed Horizontal Lifeline (Membrane) 80 mt	✓	✓
ARHLM0090	ARON	ARON Fixed Horizontal Lifeline (Membrane) 90 mt	✓	✓

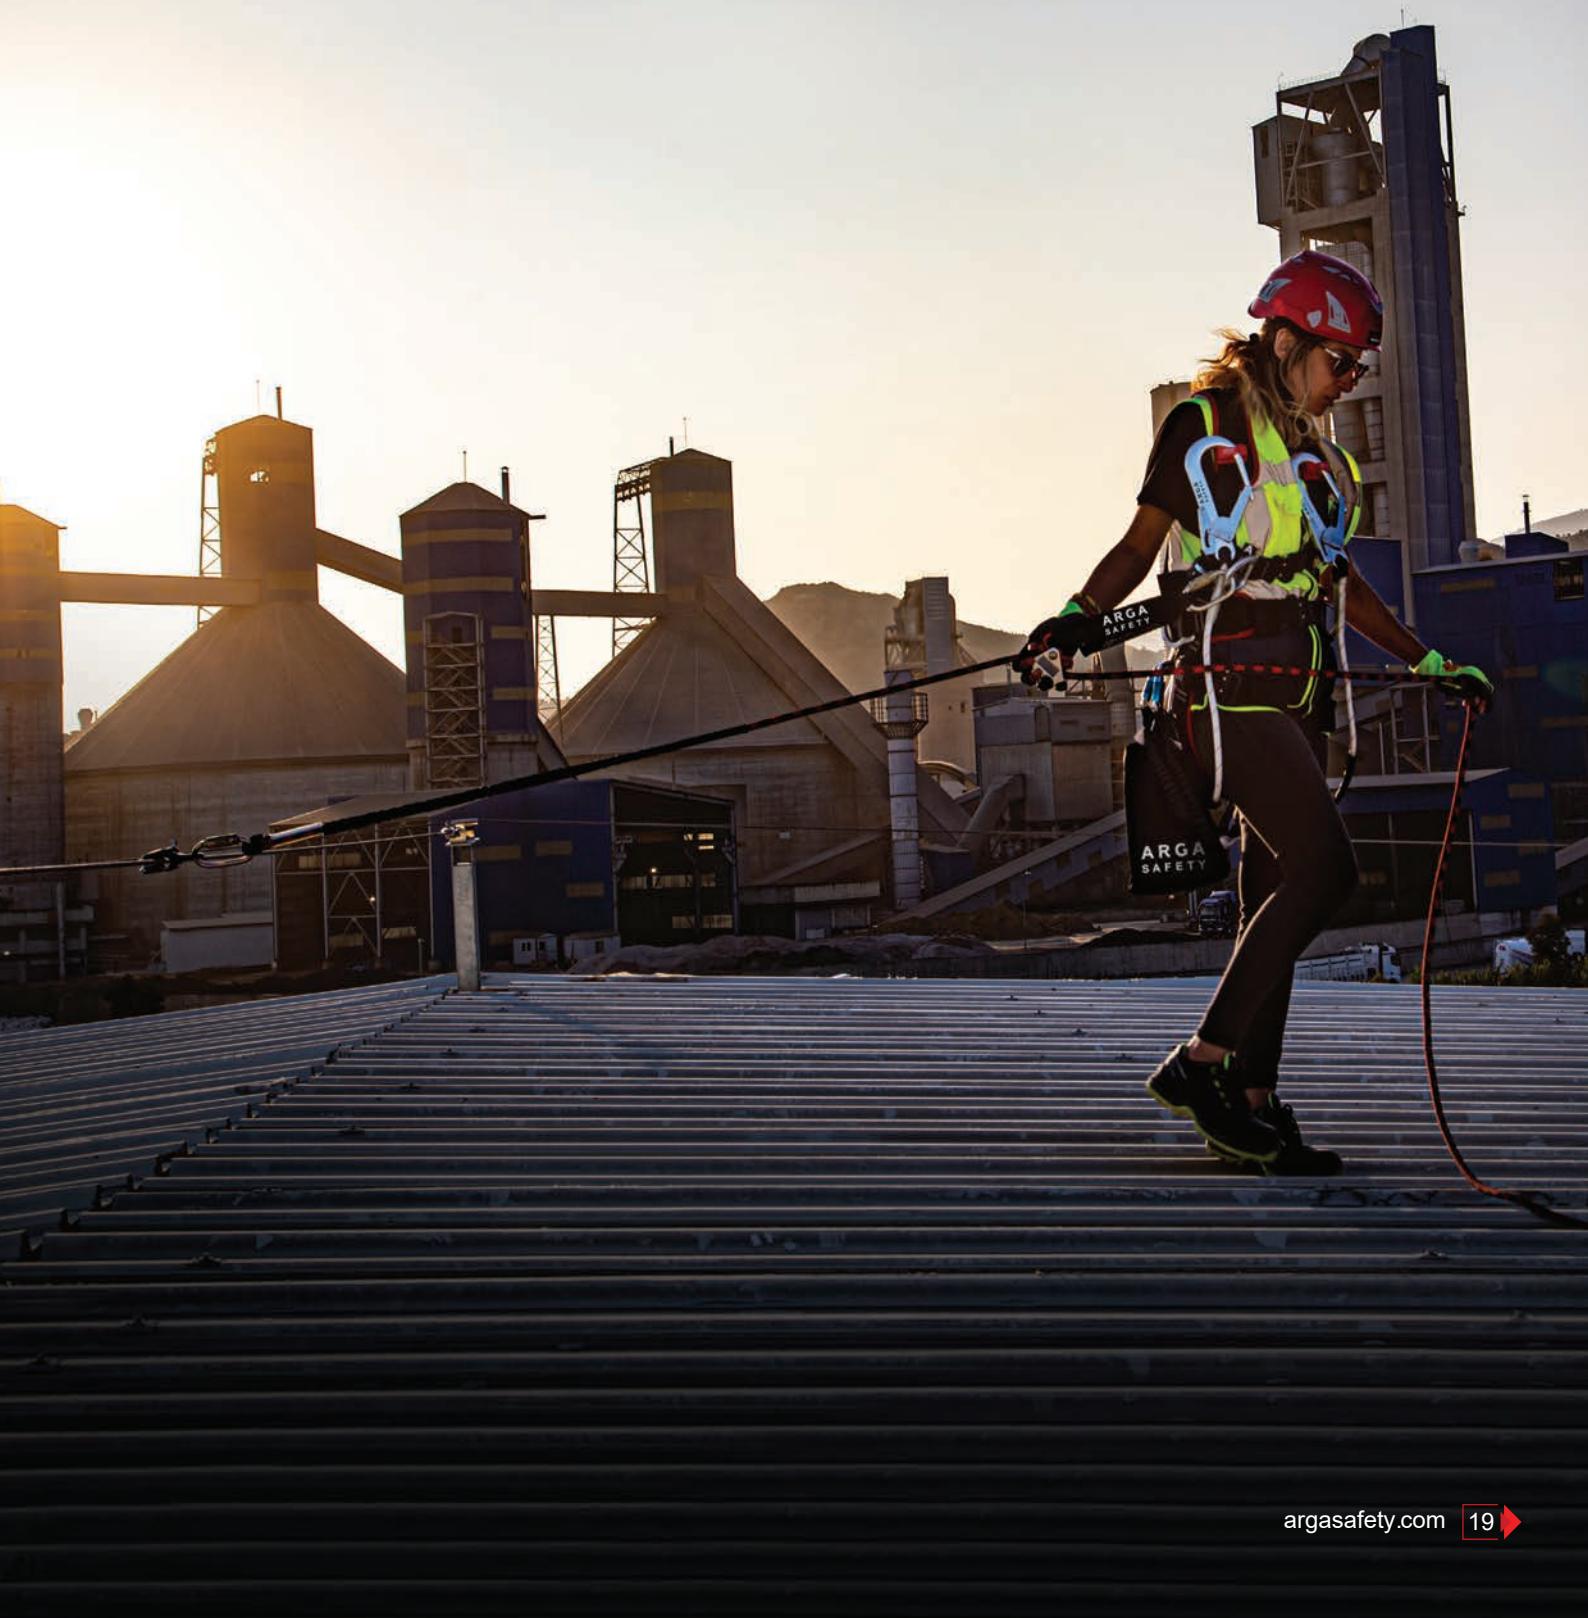



WP-1200

Horizontal Lifeline System (Overhead)

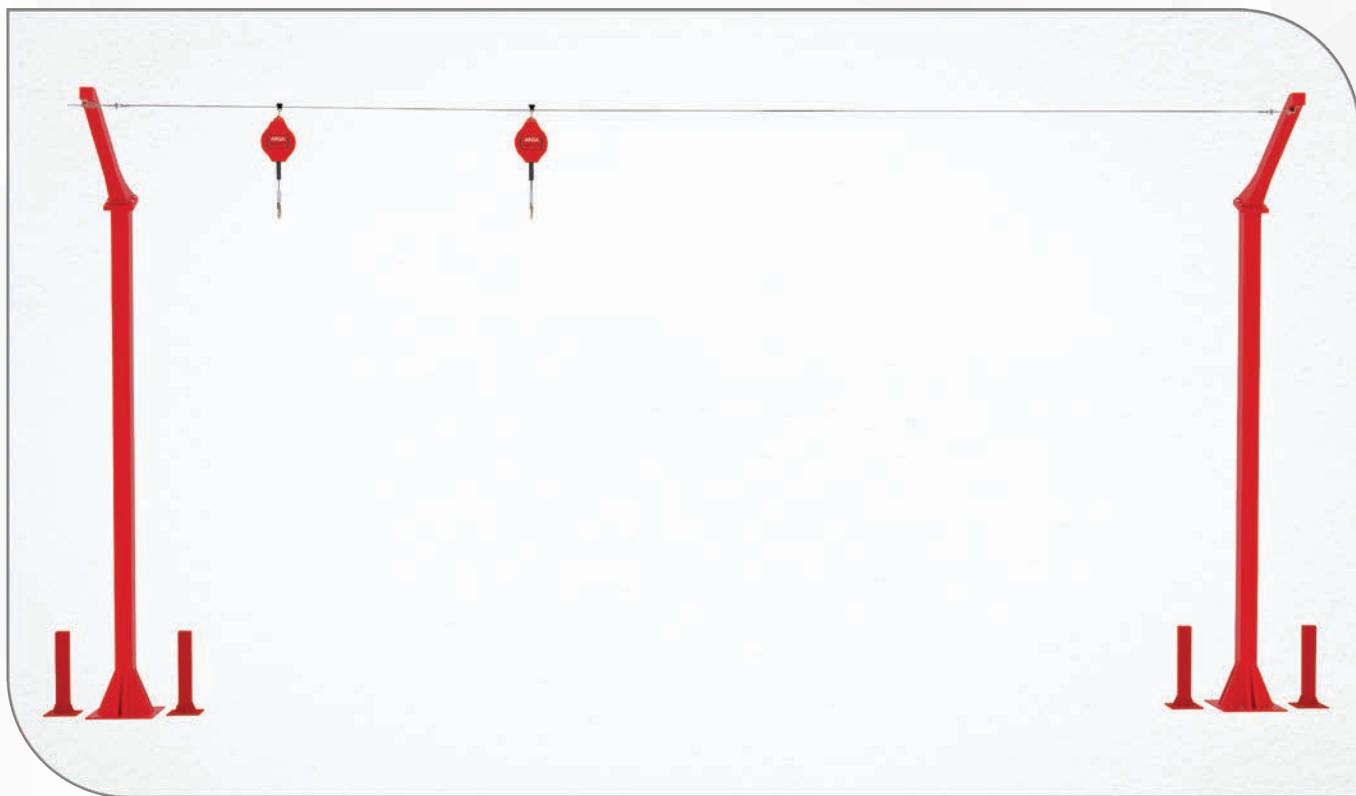**Technical Specifications**

WP-1200 Horizontal Lifeline System; prevents the risk of falling and creates safe working environments in all on-vehicle operations such as trucks, buses, wagons, trucks, filling tankers, etc. In overhead horizontal lifelines, there should be no deflection in the horizontal lifeline so that the user is not exposed to a pendulum fall in the event of a fall. The ARON Horizontal Lifeline, which is a component of the WP-1200 Horizontal Lifeline System, does not deflect thanks to its safe design. Thanks to this feature, the A5 Carriage /Glider, which is also part of the ARON Horizontal Lifeline, always remains at the user's overhead level, preventing a pendulum fall.

- * It can be installed in any desired length at intervals of 2 - 15 meters.
- * Overhead platform struts are coated with hot dip galvanization in accordance with EN 1461 standard.
- * Platform struts are specially reinforced with 2 additional struts against the risk of impact.
- * All components of the lifeline are made of stainless steel and no welding is used.
- * Lifeline components are covered by a lifetime warranty against manufacturing defects.
- * The retractable fall arrester is easily accessible and has a special connection system to prevent tripping while parking the vehicle.

Options:

- * Ladder platform is available upon request.




Ordering Information

Order Code	Product Name		Product Details					Standard		Weight (Kg/ Pcs)
	Product Name	Product Description	Length (m)	No of Struts	Height (m)	Platform Ladder	EN 795 Tip B	CEN/TS 16415 Tip B		
WP1200LP15	WP-1200	Overhead Aron Horizontal Lifeline 15 mt	15	2	6,40 m		✓	✓	873 kg	
WP1200LP20	WP-1200	Overhead Aron Horizontal Lifeline 20 mt	20	2	6,40 m		✓	✓	873 kg	
WP1200LP30	WP-1200	Overhead Aron Horizontal Lifeline 20 mt	30	3	6,40 m		✓	✓	1.309 kg	
WP1200LP45	WP-1200	Overhead Aron Horizontal Lifeline 20 mt	45	4	6,40 m		✓	✓	1.746 kg	
WP1200LP15	WP-1200	Overhead Aron Horizontal Lifeline 20 mt - with Ladder Platform	15	2	6,40 m	✓	✓	✓	1.236 kg	
WP1200LP30	WP-1200	Overhead Aron Horizontal Lifeline 30 mt - with Ladder Platform	30	2	6,40 m	✓	✓	✓	1.672 kg	
WP1200LP45	WP-1200	Overhead Aron Horizontal Lifeline 45 mt - with Ladder Platform	45	2	6,40 m	✓	✓	✓	2.109 kg	

MOLI S

Mobile Horizontal Lifeline (5 People) – with Stainless Steel Rope

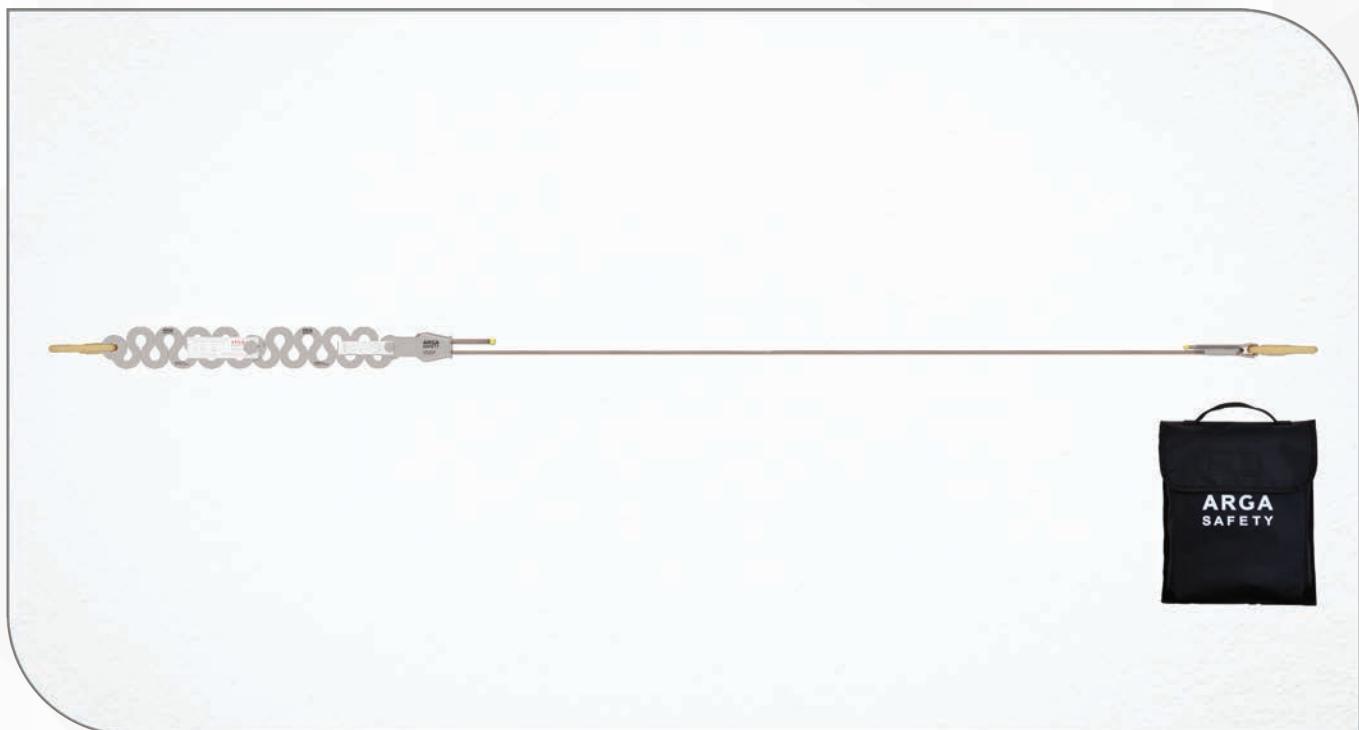

Technical Specifications

MOLI S Mobile - Portable Horizontal Lifeline allows use as a permanent anchor point between 4-30 meters in work areas where there is no anchor (safety / connection point). It is designed and manufactured to ensure that employees work safely during all kinds of construction, maintenance, repair, assembly, and disassembly works.


- * It is suitable for use by 5 users simultaneously on the mobile lifeline.
- * All components of the lifeline are made of seamless stainless steel and are covered by a lifetime warranty against manufacturing defects.
- * It is quick and easy to install, can be installed from 4 to 30 meters, has its own carrying bag.
- * It has 7x19 construction 316 Quality stainless steel rope.
- * Suitable for overhead, floor, and wall installation
- * It has optionally 2 HKS-22 T automatic 40 kN carabiners at the connection points of the mobile lifeline. This feature provides safe and fast installation at different anchor points. (C-90 Rod Anchor should be preferred for connection to iron rods in construction areas.)

Ordering Information

Order Code	Product Name		Product Details			Standard		Weight (Gr/Pcs)
	Product Name	Product Description	Length (m)	Rope Material	EN795 Type B	CEN/TS 16415 Type B	EN362	
MLSC030	MOLI-S	Mobile Horizontal Lifeline 30 m	30 m	7x19 K. 316 SS	✓	✓	✓	9.800 g

MOLI G

Mobile Horizontal Lifeline (5 People) – Galvanized Steel Rope

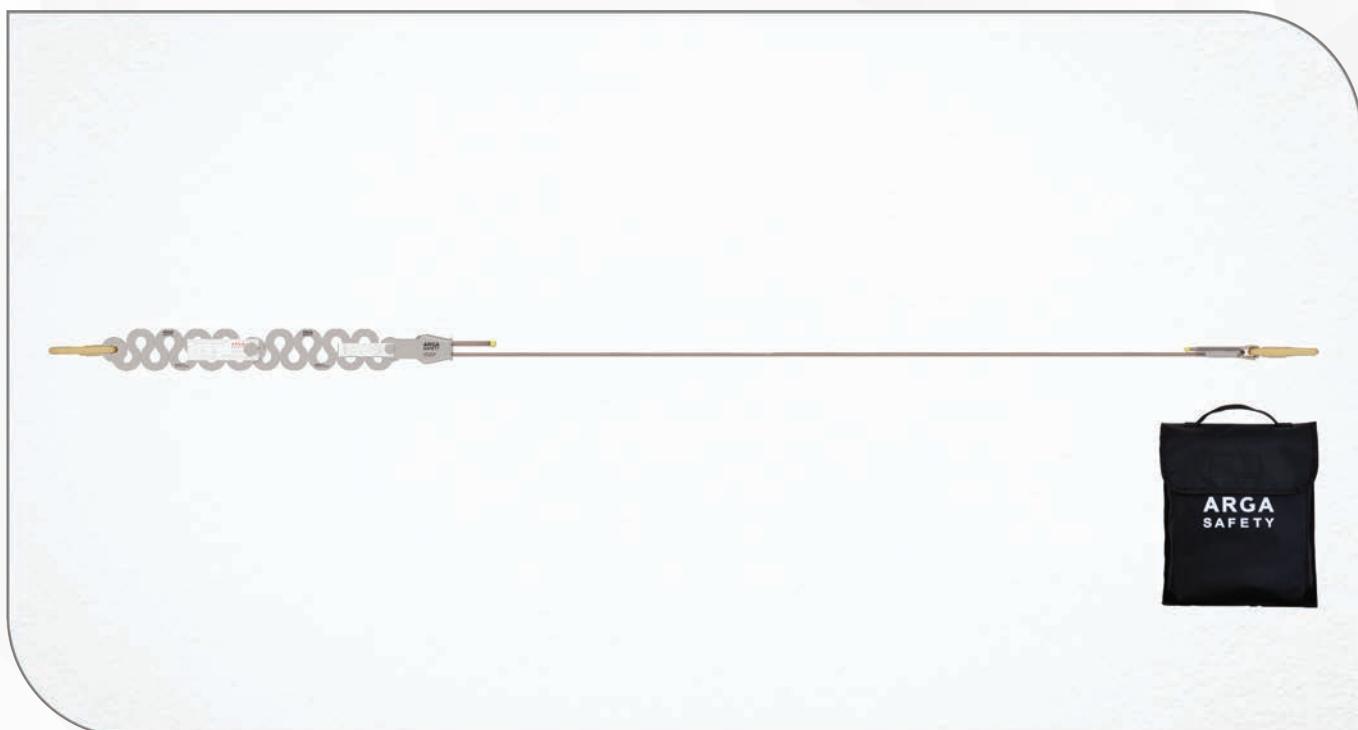

Technical Specifications

MOLI S Mobile - Portable Horizontal Lifeline It allows use as a permanent anchor point between 4-30 meters in working areas where there is no anchor (safety / connection point). It is designed and manufactured to ensure that employees work safely during all kinds of construction, maintenance, repair, assembly, and disassembly works.


- * It is suitable for use by 5 users simultaneously on the mobile lifeline.
- * All components of the lifeline are made of seamless stainless steel and are covered by a lifetime warranty against manufacturing defects.
- * It is quick and easy to install, can be installed from 4 to 30 meters, has its own carrying bag.
- * It has 6x19 construction galvanized steel rope.
- * Suitable for overhead, floor and wall installation.
- * It has optionally 2 HKS-22 T automatic 40 kN carabiners at the connection points of the mobile lifeline. This feature provides safe and fast installation at different anchor points. (C-90 Rod Anchor should be preferred for connection to iron rods in construction areas.)

Order Information

Order Code	Product Name		Product Details			Standard		Weight
	Product Name	Product Description	Length (m)	Rope Material	EN795 Type B	CEN/TS 16415 Type B	EN362	(Gr/Pcs)
MLGC030	MOLI-G	Mobile Horizontal Lifeline 30 mt	30 m	6x19 Galvanized	✓	✓	✓	9.740 g

M-200

Mobile Horizontal Lifeline (2 People)

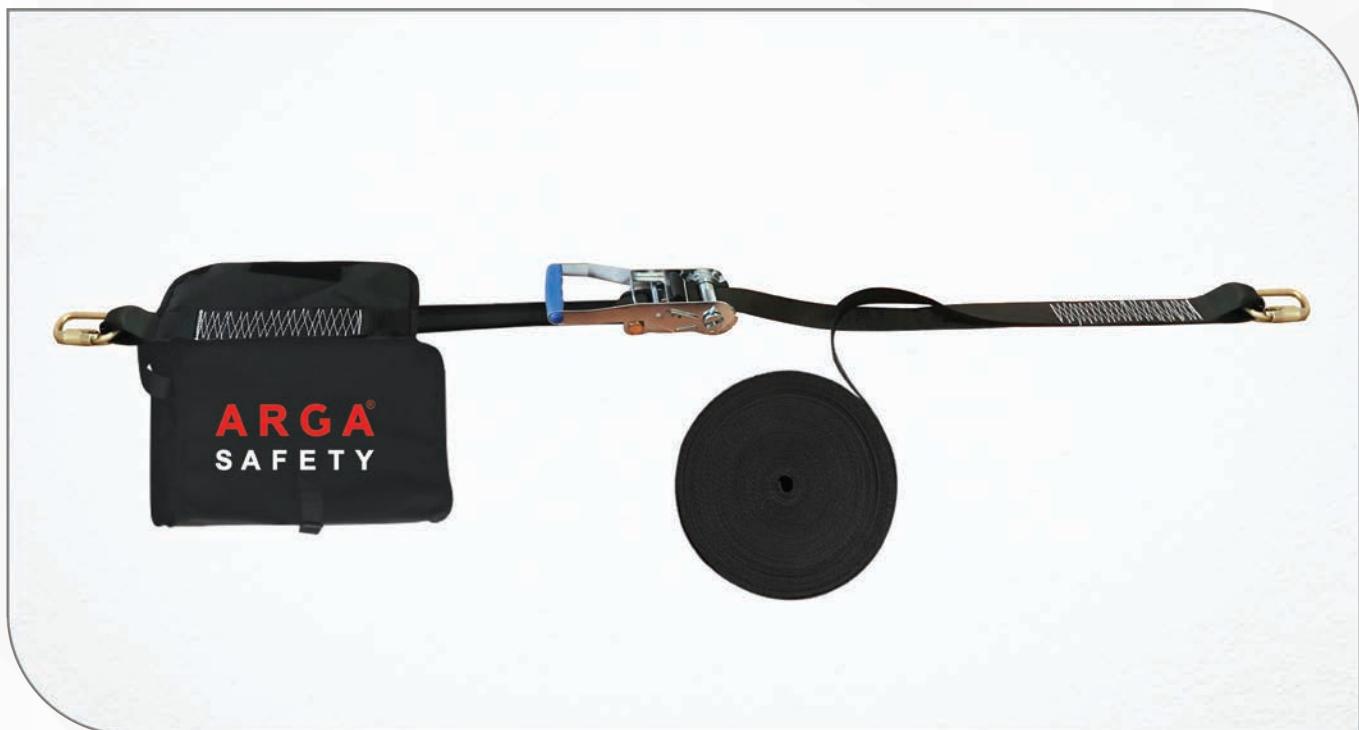**Technical Specifications**

M-200 Mobile-Portable Horizontal Lifeline allows use as a permanent anchor point between 5-20 meters in work areas where there is no anchor (safety / connection point). It is designed and manufactured to ensure that employees work safely during all kinds of construction, maintenance, repair, assembly, and disassembly works.

- * Suitable for 2 users.
- * It is easy and simple to install, can be installed from 5 to 20 meters, and has its own carrying bag.
- * It has a 50 mm high strength polyester webbing.
- * Suitable for overhead, floor, and wall installation.
- * Optionally, it has 2 HKS-22 T automatic 40 kN carabiners at both ends and can be easily connected to many points.

Options:

- * C-90 Rod Anchor should be preferred for connection to iron rods in construction areas.
- * For connection to concrete column beam or steel profile, C-70 ear anchor, ES-25 Perlon Sling or FS-45 D Ring Sling should be preferred.

Order Information

Order Code	Product Name		Product Details			Standard		Weight
	Product Name	Product Description	Length (m)	Rope Material	EN795 Type B	CEN/TS 16415 Type B	EN362	(Gr/Pcs)
M00C010	M-200	Mobile Horizontal Lifeline 10 mt	10 m	50 mm Woven Webbing	✓	✓	✓	2.700 g
M00C020	M-200	Mobile Horizontal Lifeline 20 mt	20 m	50 mm Woven Webbing	✓	✓	✓	3.700 g



A photograph of a modern building with a light grey, vertically ribbed facade. A vertical lifeline safety system is attached to the side of the building. The system consists of a grey metal pole with a bracket at the top, a coiled grey rope, and a grey metal ladder attached to the pole. The building has a dark grey metal roof with a grid pattern. There are several windows with dark frames and a large glass door on the right side. The sky is clear and blue.

VERTICAL LIFELINE

SPACE

Fixed Vertical Lifeline



1. SPACE LADDER EXTENSION: It was developed to ensure that the user remains safe after reaching the working area until moving to the safe working area. The ladder extension has an anchor eye at the top to ensure the safety of the user without leaving the vertical lifeline.



2. SPACE PASS: It prevents the steel rope on the system from being damaged, especially in strong winds. It is used every 10 meters, allowing the Space Block to work.



3. SPACE LINE: It is made of Ø 8 mm 7x19 316 quality stainless steel material and has high corrosion resistance.



4. SPACE BOTTOM & INDICATOR: The bottom bracket has a tensioning and indicator system on itself. The bottom bracket is compatible with all step types.



5. The shock absorbing system integrated on SPACE BLOCK has a carrying capacity of 140 kg. It prevents tripping in the opposite direction, and the guide rail system on the rope allows you to move up and down on the rope without getting stuck.

All materials are made of solid steel, surface treatments are done by hot dip galvanization. Its resistance to corrosion is quite high.



Ordering Information

Order Code	Product Name			Standard	Weight
	Product Name	Product Description	Length (mt)		
SPC0001	SPACE LADDER EXTENSION	Ladder Extension		EN 353-1:2014+A1:2017	10.300 g
SPC0002	SPACE PASS	Intermediate Bracket			520 g
SPC0300	SPACE LINE	Lifeline			245 g
SPC 004	SPACE BOTTOM & INDICATOR	Bottom Bucket & Tensioner and Indicator			960 g
SPC 1000	SPACE BLOCK	Rope Gripper		✓	687 g
SPC 0010	SPACE	Fixed Vertical Lifeline 10 mt	10 mt	✓	14.390 g
SPC 0020	SPACE	Fixed Vertical Lifeline 20 mt	20 mt	✓	17.360 g
SPC 0030	SPACE	Fixed Vertical Lifeline 30 mt	30 mt	✓	20.340 g
SPC 0040	SPACE	Fixed Vertical Lifeline 40 mt	40 mt	✓	23.120 g
SPC 0050	SPACE	Fixed Vertical Lifeline 50 mt	50 mt	✓	26.090 g
SPC 0060	SPACE	Fixed Vertical Lifeline 60 mt	60 mt	✓	29.060 g
SPC 0070	SPACE	Fixed Vertical Lifeline 70 mt	70 mt	✓	32.030 g
SPC 0080	SPACE	Fixed Vertical Lifeline 80 mt	80 mt	✓	35.000 g



SPACE LADDER EXTENSION

Components of Fixed Vertical Lifeline with Ladder Extension




1. SPACE LADDER EXTENSION; It has been developed to keep the users safe from the moment they reach the floor of the work area until they reach the safe working area. The ladder extension has an anchorage eye on it that enables users to connect their Shock Absorbing lanyard before leaving the vertical lifeline.

It is fixed to the top three (3) steps of the ladder, compatible with all ladder types, easy to install.

Made of steel material, surface coating is dip galvanized.



5. The shock absorbing system integrated on SPACE BLOCK has a carrying capacity of 140 kg. It prevents tripping in the opposite direction, and the guide rail system on the rope allows you to move up and down on the rope without getting stuck.

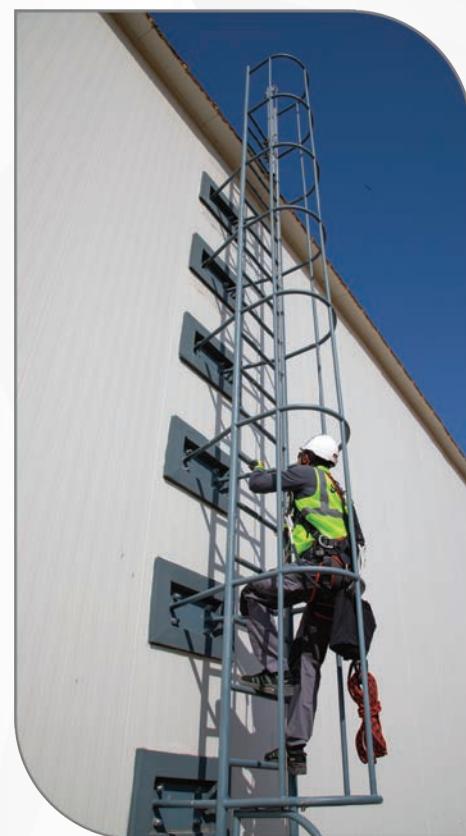


2. It prevents the steel rope on the system from being damaged, especially in strong winds. It is used every 10 meters, allowing the **SPACE BLOCK** to work.

3. SPACE LINE; It is made of Ø 8 mm 7x19 316 quality stainless steel material and has high corrosion resistance.

4. SPACE BOTTOM & INDICATOR: The bottom bracket has a tensioning and indicator system on it. The bottom bracket is compatible with all step types.

FIXED VERTICAL LIFELINE

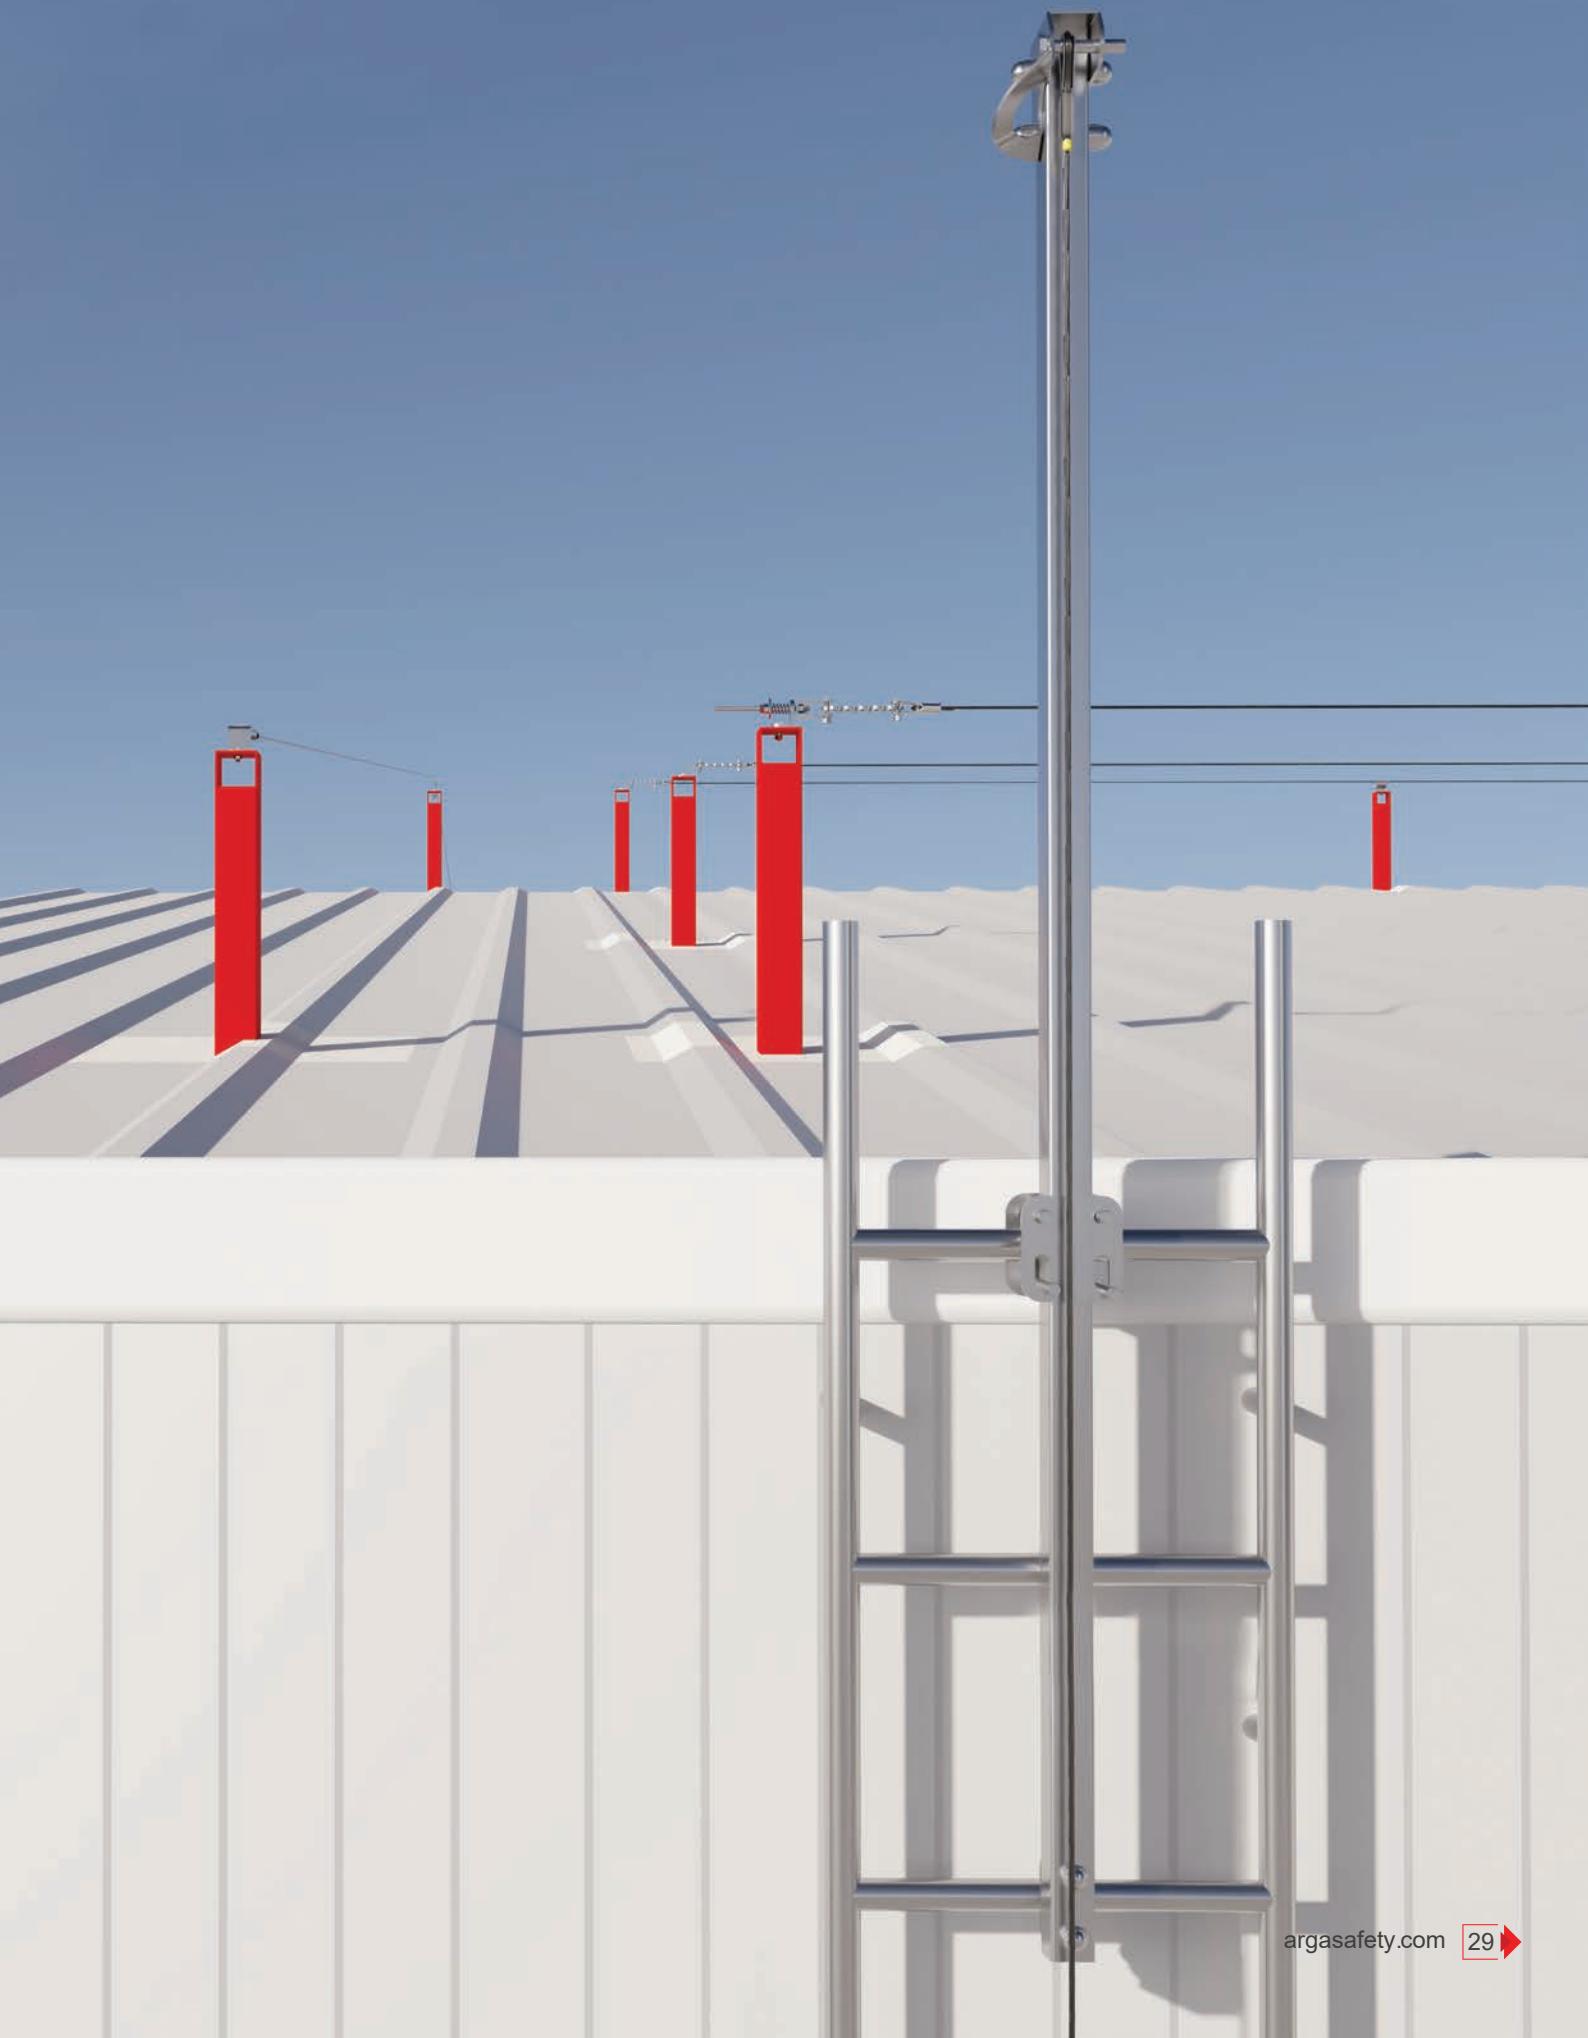

VERTILIFE

Mobile Vertical Lifeline



VERTILIFE



VERTILIFE OKS-17 S



VERTILIFE DSS-53



Technical Specifications

VERTILIFE Mobile-Portable Vertical Lifeline creates a permanent anchor point between 1-200 meters on vertical ladders that do not have an anchor (safety point). It is designed and manufactured to ensure that employees work safely during all kinds of construction, maintenance, repair, assembly, and disassembly works.

- * It is made of Ø 12 mm high-strength static rope that meets the EN 1891 standard and is resistant to friction and dirt.
- * Suitable for horizontal use and working with sharp edges.
- * The rope grab is easy to adjust.
- * Thanks to the shock absorber on it, the load on the user in case of a possible fall remains below 6 kN.

Product Types:

- * VERTILIFE
- * VERTILIFE OKS-17 S (There is OKS-17 S at the end of the lifeline and OKS-17 S Carabiner at the Shock Absorber end.)
- * VERTILIFE DSS-53 (There is DSS-53 at the end of the lifeline and OKS-17 S Carabiner at the Shock Absorber end.)



Ordering Information

Order Code	Product Name		Product Details			Standard		Weight
	Product Name	Product Description	Length (mt)	Rope Carabiner	Shock Absorber Carabiner	EN 353-2	RfU 11.075	(Gr/Pcs)
VL00010	VERTILIFE	Mobile Vertical Lifeline 10 mt	10 mt			✓	✓	1.520 g
VL00020	VERTILIFE	Mobile Vertical Lifeline 20 mt	20 mt			✓	✓	2.440 g
VL00030	VERTILIFE	Mobile Vertical Lifeline 30 mt	30 mt			✓	✓	3.360 g
VL00040	VERTILIFE	Mobile Vertical Lifeline 40 mt	40 mt			✓	✓	4.280 g
VL00050	VERTILIFE	Mobile Vertical Lifeline 50 mt	50 mt			✓	✓	5.200 g
VL00060	VERTILIFE	Mobile Vertical Lifeline 60 mt	60 mt			✓	✓	6.120 g
VL00070	VERTILIFE	Mobile Vertical Lifeline 70 mt	70 mt			✓	✓	7.040 g
VL00080	VERTILIFE	Mobile Vertical Lifeline 80 mt	80 mt			✓	✓	7.960 g
VL10010	VERTILIFE OKS-17 S	Mobile Vertical Lifeline 10 mt	10 mt	OKS-17 S	OKS-17 S	✓	✓	1.860 g
VL10020	VERTILIFE OKS-17 S	Mobile Vertical Lifeline 20 mt	20 mt	OKS-17 S	OKS-17 S	✓	✓	2.200 g
VL10030	VERTILIFE OKS-17 S	Mobile Vertical Lifeline 30 mt	30 mt	OKS-17 S	OKS-17 S	✓	✓	2.540 g
VL10040	VERTILIFE OKS-17 S	Mobile Vertical Lifeline 40 mt	40 mt	OKS-17 S	OKS-17 S	✓	✓	2.880 g
VL10050	VERTILIFE OKS-17 S	Mobile Vertical Lifeline 50 mt	50 mt	OKS-17 S	OKS-17 S	✓	✓	3.220 g
VL10060	VERTILIFE OKS-17 S	Mobile Vertical Lifeline 60 mt	60 mt	OKS-17 S	OKS-17 S	✓	✓	3.560 g
VL10070	VERTILIFE OKS-17 S	Mobile Vertical Lifeline 70 mt	70 mt	OKS-17 S	OKS-17 S	✓	✓	3.900 g
VL20010	VERTILIFE DSS-53	Mobile Vertical Lifeline 10 mt	10 mt	DSS-53	OKS-17 S	✓	✓	2.190 g
VL20020	VERTILIFE DSS-53	Mobile Vertical Lifeline 20 mt	20 mt	DSS-53	OKS-17 S	✓	✓	2.860 g
VL20030	VERTILIFE DSS-53	Mobile Vertical Lifeline 30 mt	30 mt	DSS-53	OKS-17 S	✓	✓	3.530 g
VL20040	VERTILIFE DSS-53	Mobile Vertical Lifeline 40 mt	40 mt	DSS-53	OKS-17 S	✓	✓	4.200 g
VL20050	VERTILIFE DSS-53	Mobile Vertical Lifeline 50 mt	50 mt	DSS-53	OKS-17 S	✓	✓	4.890 g
VL20060	VERTILIFE DSS-53	Mobile Vertical Lifeline 60 mt	60 mt	DSS-53	OKS-17 S	✓	✓	5.560 g
VL20070	VERTILIFE DSS-53	Mobile Vertical Lifeline 70 mt	70 mt	DSS-53	OKS-17 S	✓	✓	6.230 g



TRIPODS



OCEAN TRIPOD

Adjustable Tripod (2 People)



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Anchorage points are made of stainless steel.



3. The outer body of the P-10 pulley with integrated closed bearing system is made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.



5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Galvanized chain and carabiner set for fixing the legs.



Tripod Height : 150 – 250 cm,

Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Ordering Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight (Gr/Pcs)
	Product Name	Product Description	EN795 Tip B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
OT00011	P-10	Tripod Pulley						2.750 g

OCEAN TRIPOD - 15R SET (15 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest Set with Rescue Arm



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.



5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Retractable Fall Arrest with Arm (Winch) (Used as both a fall arrester and lowering/lifting equipment.)



7. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).



Tripod Height : 150 – 250 cm,
Tripod Leg Width : 110- 180 cm (Inwardly)

**Ordering Information**

Ordering Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight (Gr/Pcs)
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						2.350 g
VSR0015	RSRL-15	Fall Arrester with Retractable Arm - 15 meter			15 m	✓	✓	11.900 g

OCEAN TRIPOD - 20R SET (20 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest Set with Rescue Arm - 20 mt



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.




5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Retractable Fall Arrest with Arm (Winch) (Used as both a fall arrester and lowering/lifting equipment.)



7. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).

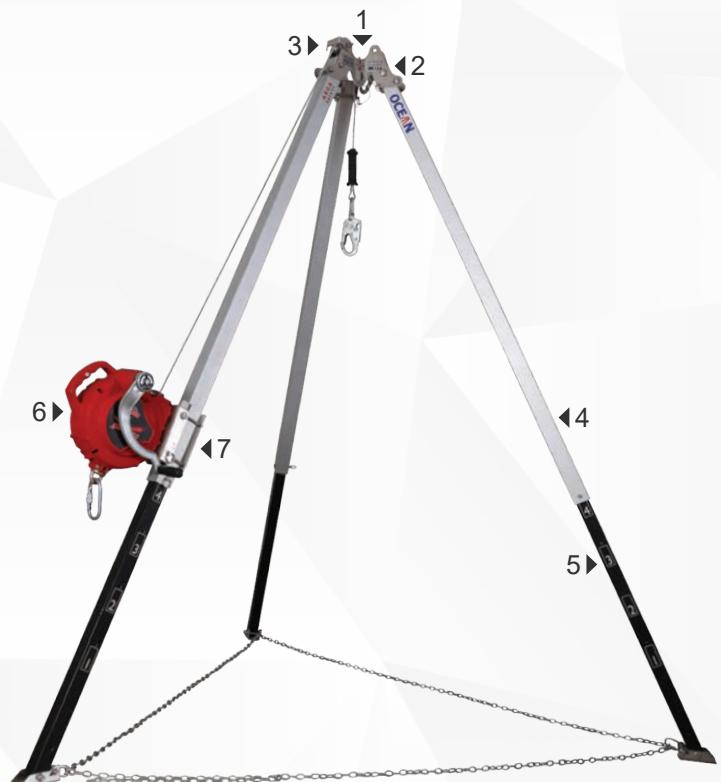

Tripod Height : 150 – 250 cm,

Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Ordering Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight (Gr/Pcs)
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						3.260 g
VSR0020	RSRL-20	Fall Arrester with Retractable Arm - 20 meter			15 m	✓	✓	9.800 g

OCEAN TRIPOD- 6 SET (6 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest - 6 mt



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.



5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Galvanized chain and carabiner set for fixing the legs.



7. Retractable Fall Arrester.



Tripod Height : 150 – 250 cm,
Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Ordering Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	(Gr/Pcs)
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
ASRL06SH	ARES SRL-6 SH	ARES Retractable Fall Arrester 6 mt			6 m	✓		3.650 g

OCEAN TRIPOD- 10 SET (10 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest - 10 mt



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.



5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Galvanized chain and carabiner set for fixing the legs.



7. Retractable Fall Arrester.



Tripod Height : 150 – 250 cm,

Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Ordering Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	(Gr/Pcs)
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
ASRL10SH	ARES SRL-10 SH	ARES Retractable Fall Arrester 10 mt			10 m	✓		4.400 g

OCEAN TRIPOD- 20 SET (20 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest - 20 mt



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.



5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Galvanized chain and carabiner set for fixing the legs.



7. Retractable Fall Arrester.



Tripod Height : 150 – 250 cm,
Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Order Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	(Gr/Pcs)
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
ASRL20SH	ARES SRL-20 SH	ARES Retractable Fall Arrester 20 mt			20 m	✓		9.100 g

OCEAN TRIPOD – S6L (6 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest + Load Winch Set



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.



5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).



7. Load Winch (Used only as load lowering/lifting equipment).



Tripod Height : 150 – 250 cm,
Tripod Leg Width : 110- 180 cm (Inwardly)

Ordering Information

Order Code	Product Name		Tripod Standard		Fall Arrestor Standard			Weight
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	(Gr/Pcs)
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
ASRL06SH	ARES SRL-06 SH	ARES Retractable Fall Arrester 6 mt			6 m	✓		3.650 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						2.350 g
OTL0006	LV-06	Load Winch (SWL:300 kg) 6 mt			6 m		✓	5.500 g



OCEAN TRIPOD – S10L (10 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest + Load Winch Set



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Retractable Fall Arrester.




5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).



7. Load Winch (Used only as load lowering/lifting equipment.).

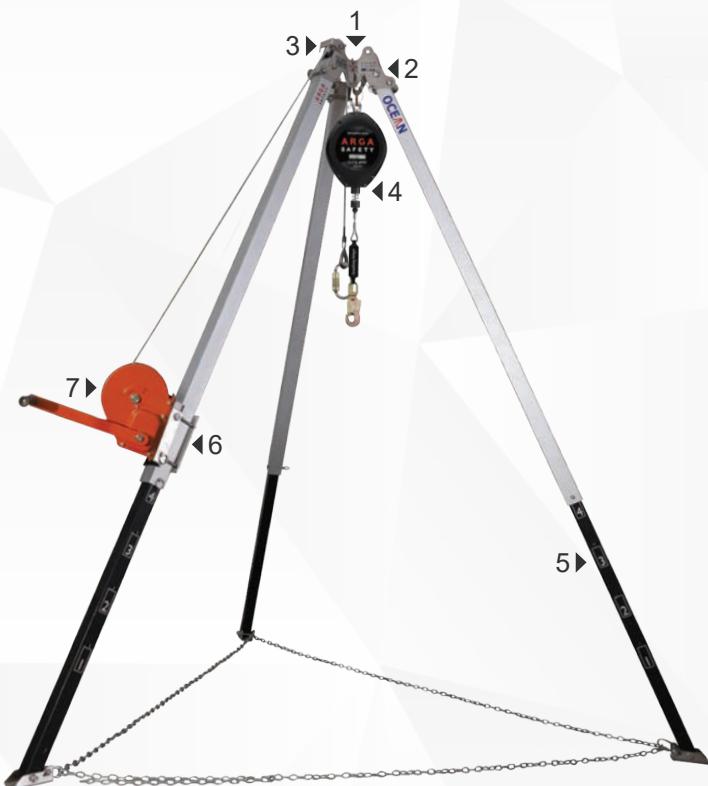

Tripod Height : 150 – 250 cm,
Tripod Leg Width : 110- 180 cm (Inwardly)

Ordering Information

Order Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight (Gr/Pcs)
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
ASRL10SH	ARES SRL-10 SH	ARES Retractable Fall Arrester 10 mt			10 m	✓		4.400 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						2.350 g
OTL0010	LV-10	Load Winch (SWL:300 kg) 10 mt			10 m		✓	7.400 g

OCEAN TRIPOD – S20L (20 mt)

Adjustable Tripod (2 People) + Retractable Fall Arrest + Load Winch Set



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.



5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).



7. Load Winch (Used only as load lowering/lifting equipment.).



Tripod Height : 150 – 250 cm,

Tripod Leg Width : 110- 180 cm (Inwardly)

Ordering Information

Order Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight (Gr/Pcs)
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
ASRL20SH	ARES SRL-20 SH	ARES Retractable Fall Arrester 20 mt			20 m	✓		9.100 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						2.350 g
OTL0020	LV-20	Load Winch (SWL:300 kg) 20 mt			20 m		✓	9.200 g



OCEAN TRIPOD – 6L (6 mt)

Adjustable Tripod (2 People) + Load Winch Set



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.




5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).



7. Load Winch (Used only as load lowering/lifting equipment.).

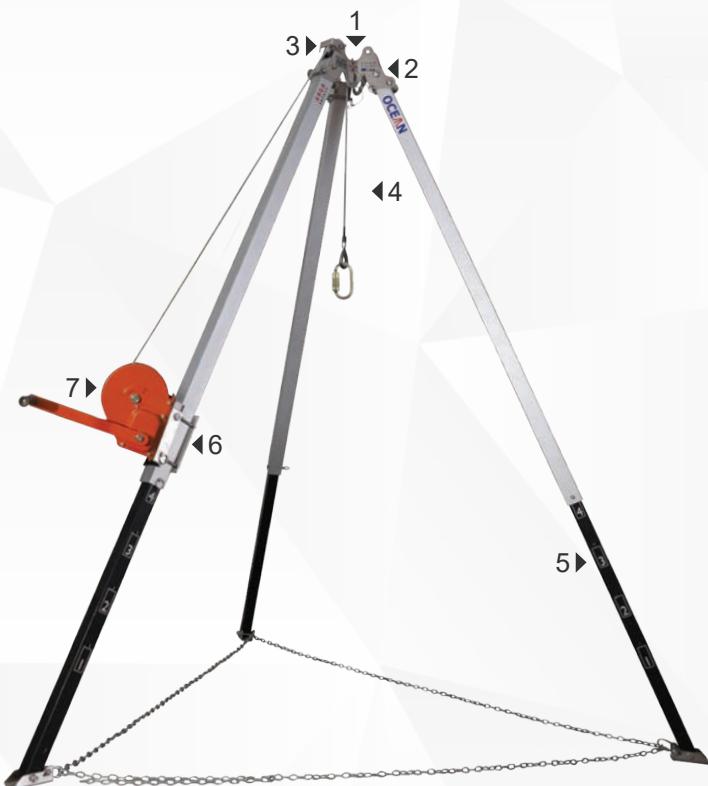

Tripod Height : 150 – 250 cm,
Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Order Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	(Gr/Pcs)
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						2.350 g
OTL0006	LV-06	Load Winch (SWL:300 kg) 6 mt			6 m		✓	5.300 g

OCEAN TRIPOD – 10L (10 mt)

Adjustable Tripod (2 People) + Load Winch Set



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.




5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).



7. Load Winch (Used only as load lowering/lifting equipment.)

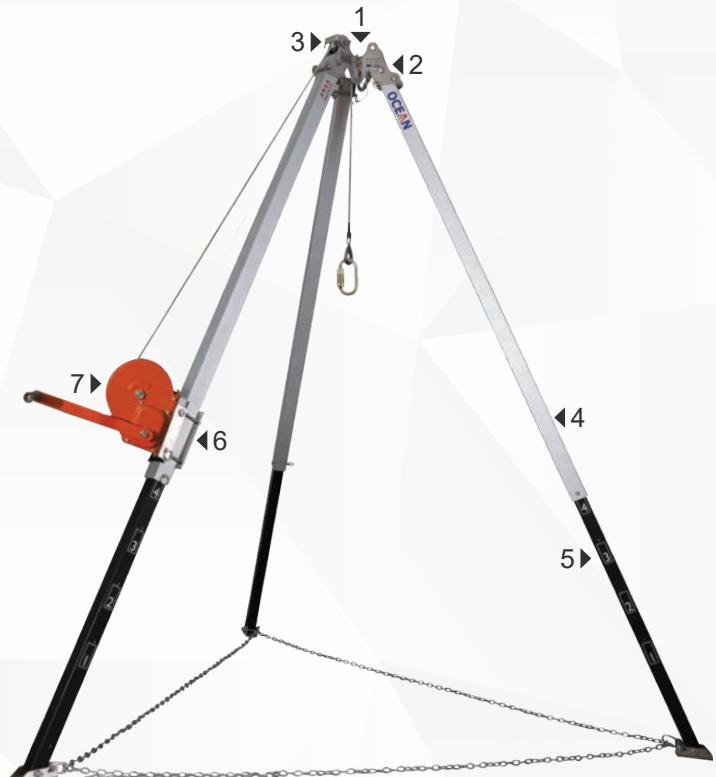

Tripod Height : 150 – 250 cm,

Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Order Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight (Gr/Pcs)
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						2.350 g
OTL0010	LV-10	Load Winch (SWL:300 kg) 10 mt			10 m		✓	5.500 g

OCEAN TRIPOD – 20L (20 mt)

Adjustable Tripod (2 People) + Load Winch Set



1. OCEAN TRIPOD Suitable for 2 (two) users.



2. Stainless Steel Head.



3. P-10 pulley with integrated closed bearing system, housing made of stainless steel.



4. Tripod legs are made of high strength T6061 series aluminum material.




5. Provides use between 150 - 250 cm thanks to its 8 level adjustable legs.



6. Tested and certified together with the Tripod Connection Bracket (OCEAN TRIPOD).



7. Load Winch (Used only as load lowering/lifting equipment.).

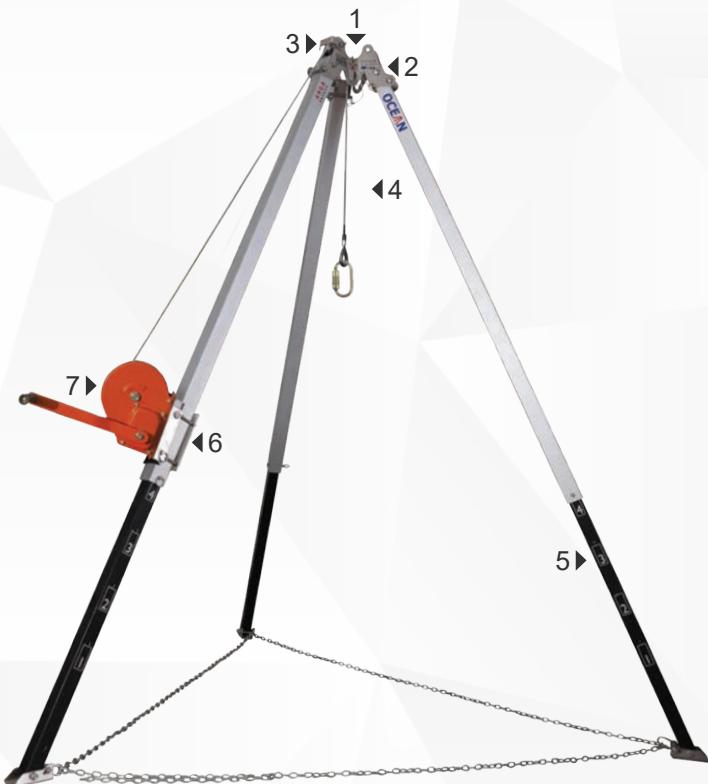

Tripod Height : 150 – 250 cm,
Tripod Leg Width : 110- 180 cm (Inwardly)



Ordering Information

Order Code	Product Name		Tripod Standard		Fall Arraster Standard			Weight (Gr/Pcs)
	Product Name	Product Description	EN795 Type B	CEN/TS 16415 Type B	Length (m)	EN 360	EN 1496	
OT00010	OCEAN TRIPOD	Adjustable Tripod with Pulley (2 People)	✓	✓				22.100 g
OT00012	SRL-B	Tripod Connection Bracket (For SRL with winch)						2.350 g
OTL0020	LV-20	Load Winch (SWL:300 kg) 20 mt			20 m		✓	7.400 g





CONSOLE ARMS



ARGA
SAFETY The Safest
Way of
Working at Height

 argasafety.com

MIRACLE 360

Console Anchor (Concrete Mounting) (For 2 Persons)



1. Independent anchors suitable for use by 2 (two) users.



2. 360° rotatable anchor head - can be limited to 180° upon request.



3. Anchor arm length 1.5 mt.



4. Adjustable anchor height up to 7.0 meters.



5. Concrete mounting leg.



Surface: Sandblasting + Cataphoresis + Powder Coating



300
Kg



Ordering Information

Order Code	Product Name		Leg		Standard			Weight
	Product Name	Product Description	Leg type	Ramp	EN 795	CEN/TS 16415	EN 360	(Kg / Pcs)
MC000010	MIRACLE 360	Console Anchor (Fixed to Concrete) (For 2 Persons)	Concrete Fixed Leg		✓	✓	Provide info when ordering	340 kg

MIRACLE 360

Console Anchor (with 4 x Leg Supports) (For 2 Persons)



1. Independent anchors suitable for use by 2 (two) users.



2. 360° rotatable anchor head - can be limited to 180° upon request.



3. Anchor arm length 1.5 mt.



4. Adjustable anchor height up to 7.0 meters.



5. 4 x Leg Supports.



6. Can be transported by forklift.



Surface: Sandblasting + Cataphoresis + Powder Coating



Ordering Information

Order Code	Product Name		Leg		Standard			Weight (Kg/Pcs)
	Product Name	Product Description	Leg Support	Ramp	EN 795	CEN/TS 16415	EN 360	
MC4A0010	MIRACLE 360	Adjustable Console Anchor (2 Person) (4 Legs)	4		✓	✓	Provide info when ordering	400 kg

MIRACLE 360

Console Anchor (3 Legs, 1 Ramp Supported) (For 2 Persons)



1. Independent anchors suitable for use by 2 (two) users.



2. 360° rotatable anchor head - can be limited to 180° upon request.



3. Anchor arm length 1.5 mt.



4. Adjustable anchor height up to 7.0 meters.



5. 3 x Leg Supports.



6. 1 x Ramp Support.



7. Can be transported by forklift.



Surface: Sandblasting + Cataphoresis + Powder



Ordering Information

Order Code	Product Name		Leg		Standard			Weight
	Product Name	Product Description	Leg Support	Ramp	EN 795	CEN/TS 16415	EN 360	(Kg/Pcs)
MC3A1R10	MIRACLE 360	Adjustable Console Anchor (2 Person) (3 Legs, 1 Ramp Supported)	3	1	✓	✓	Provide info when ordering	510 kg

MIRACLE 360

Console Anchor (2 Legs, 2 Ramp Supported) (For 2 Persons)



1. Independent anchors suitable for use by 2 (two) users.



2. 360° rotatable anchor head - can be limited to 180° upon request.



3. Anchor arm length 1.5 mt.



4. Adjustable anchor height up to 7.0 meters.



5. 2 x Leg Supports.



6. 2 Ramp Supports.



7. Can be transported by forklift.



Surface: Sandblasting + Cataphoresis + Powder



Ordering Information

Order Code	Product Name		Leg		Standard			Weight (Kg/Pcs)
	Product Name	Product Description	Leg Support	Ramp	EN 795	CEN/TS 16415	EN 360	
MC2A2R10	MIRACLE 360	Adjustable Console Anchor (2 Person) (2 Legs, 2 Ramp Supported)	2	2	✓	✓	Provide info when ordering	625 kg

MIRACLE ARM 360 DAVID ARM POLE HOIST SYSTEM



1. MIRACLE ARM 360 Davit Arm
1 (one) is suitable for the user.



2. Aluminum material pulley system.



3. Steel cable passageways are guided by aluminum pulleys.



4. Winch-operated Retractable Fall Arrestor and connection.



5. Crane and lifting accessories for lifting operations.



6. Fixed foot system.



Capacity : 300 kg working capacity

Weight : 19 kg

Height : 150 – 190 cm

Davit Arm Length: 68 - 110 cm




Ordering Information

Order Code	Product Name		Standard		Retractable Standards		Weight (Kg/Pcs)	
	Product Name	Product Description	EN795 Tip A	CEN/TS 16415	Length (m)	EN 360	EN 1496	
MD00010	MIRACLE ARM 360 KONSOL	Adjustable Console Anchor (2 Person)	✓					19.00 kg
OT00012	SRL-B	Connection Bracket (SRL winch)						
VSR0015	RSRL-15	Retractable Fall Arrester with Winch 15 meter			15	✓	✓	11,90 kg
OTL0020	LV-20	Load Arrester (SWL:300 kg) 20 meter			20		✓	



ANCHORAGE SLINGS

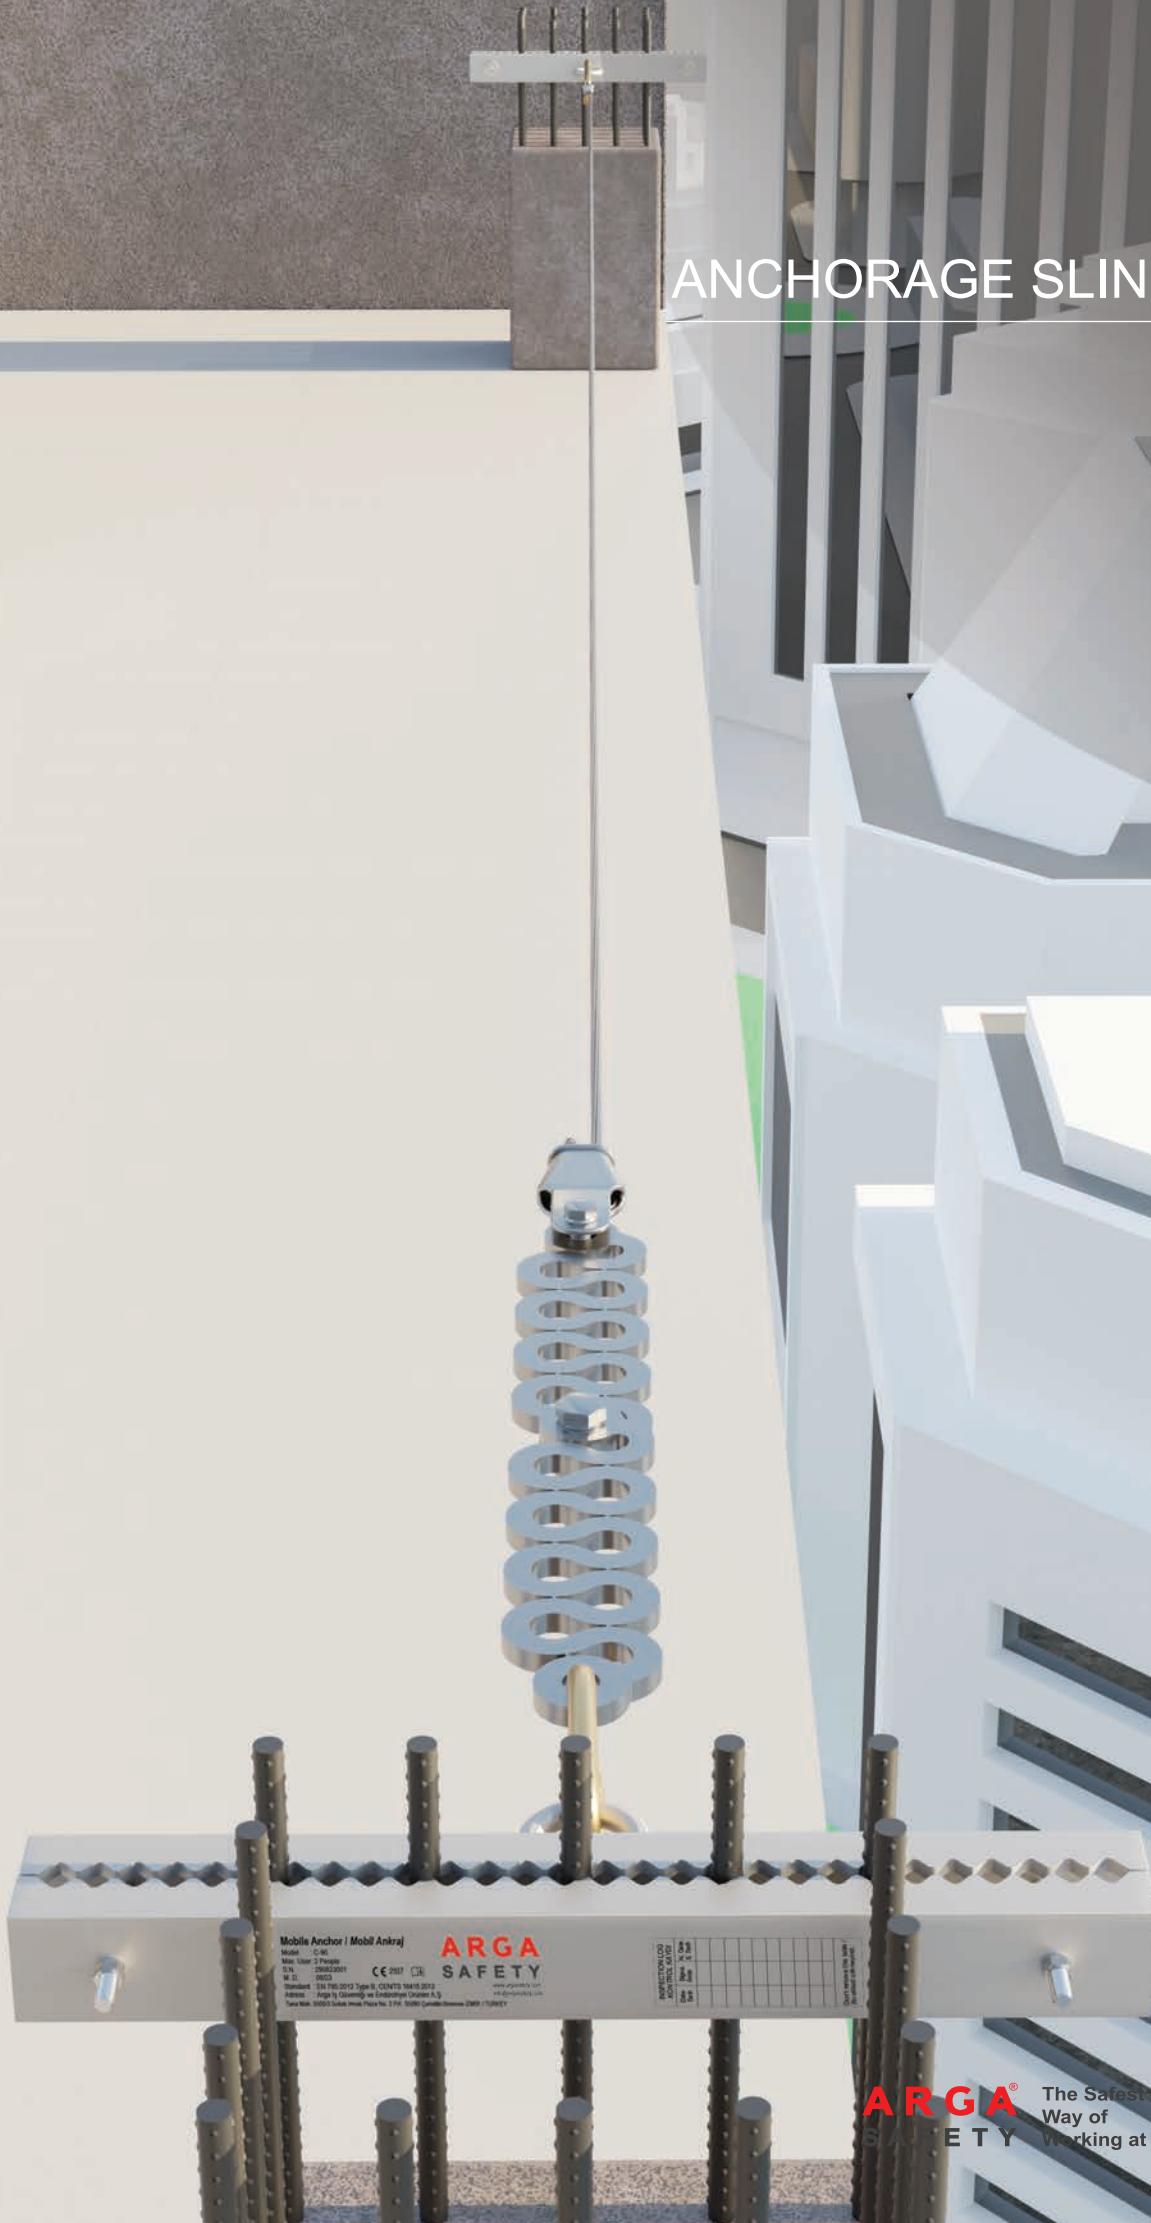

ARGA[®] The Safest Way of Working at Height  argasafety.com

ES-25

Perlon Slings (2 Persons)

- * Developed to create safe anchorage points from load-bearing structures such as steel and concrete.
- * 25 mm wide tubular Perlon sling
- * Can be used with many different applications.
- * It is suitable for 2 people to anchor.
- * High strength Bonded type sewing thread.
- * Production by CNC fully automatic sewing machines.



Ordering Information

Order Code	Product Name		Length (m)	Standard			Weight (Gr/Pcs)
	Product Name	Product Description		EN795 Type B	CEN/TS 16415 Type B	EN362	
ES00050	ES-25	Perlon Sling (2 Persons)	0,50 m	✓	✓	✓	54 g
ES00100	ES-25	Perlon Sling (2 Persons)	1,00 m	✓	✓	✓	103 g
ES00150	ES-25	Perlon Sling (2 Persons)	1,50 m	✓	✓	✓	108 g
ES00200	ES-25	Perlon Sling (2 Persons)	2,00 m	✓	✓	✓	200 g

FS-45

Sling with D-Ring (2 Persons)

- * Developed to create safe anchorage points from load-bearing structures such as steel and concrete.
- * 45 mm high strength sling.
- * High strength stainless steel material D ring on both ends.
- * Can be used with many different applications.
- * It is suitable for 2 people to anchor.
- * High strength bonded type sewing thread.



Ordering Information

Order Code	Product Name		Length (m)	Standard			Weight (Gr/Pcs)
	Product Name	Product Description		EN795 Type B	CEN/TS 16415 Type B	EN362	
FS00050	FS-45	Sling with D-Ring (2 Persons)	0,50 m	✓	✓	✓	190 g
FS00100	FS-45	Sling with D-Ring (2 Persons)	1,00 m	✓	✓	✓	225 g
FS00150	FS-45	Sling with D-Ring (2 Persons)	1,50 m	✓	✓	✓	264 g
FS00200	FS-45	Sling with D-Ring (2 Persons)	2,00 m	✓	✓	✓	301 g

STEEL S

Steel Sling

- * Developed to create safe anchorage points from load-bearing structures such as steel and concrete.
- * Ø 8 mm (7x19) 316 quality stainless steel rope.
- * Can be used with many different applications.
- * It is suitable for 1 person to anchor.
- * Suitable for use as a lanyard.



Ordering Information

Order Code	Product Name		Material	Length (m)	Standard		Weight (Gr/Pcs)
	Product Name	Product Description			EN795 Type B	EN354	
SS08050	STEEL S	Steel Sling / Lanyard	Stainless	0,50 m	✓	✓	321 g
SS08100	STEEL S	Steel Sling / Lanyard	Stainless	1,00 m	✓	✓	464 g
SS08150	STEEL S	Steel Sling / Lanyard	Stainless	1,50 m	✓	✓	607 g
SS08200	STEEL S	Steel Sling / Lanyard	Stainless	2,00 m	✓	✓	750 g

C-70

Bolt Hanger (2 Persons)

- * Used to create a fixed anchor point in concrete, rock, or steel profiles.
- * 316 quality stainless steel.
- * 2 people can use it at the same time.



Ordering Information

Order Code	Product Name		Material	Standard		Weight (Gr/Pcs)
	Product Name	Product Description		EN795 Type B	CEN/TS 16415 Type B	
C70S010	C-70	Bolt Hanger (2 Persons)	Stainless	✓	✓	48 g
C70S010	C-70 B	Bolt Hanger & Nail ((2 Persons)	Stainless	✓	✓	148 g
C70S030	AB-110	Nail 110 mm	Stainless	✓	✓	100 g

A-100 L, A-100 R

Anchorage (2 Persons)

- * Used to create a fixed anchor point in concrete, rock, or steel profiles.
- * Used to create anchor points in electrical transmission towers.
- * Can be used with M16 or M14 bolts and dowels.
- * 316 quality stainless steel.



Ordering Information

Order Code	Product Name		Material	Standard		Weight (Gr/Pcs)
	Product Name	Product Description		EN795 Type B	CEN/TS 16415 Type B	
A100L14	A-100 L (M14)	Anchorage - Left	Stainless	✓	✓	
A100L16	A-100 L (M16)	Anchorage - Left	Stainless	✓	✓	
A100R14	A-100 R (M14)	Anchorage - Right	Stainless	✓	✓	
A100R16	A-100 R (M16)	Anchorage - Right	Stainless	✓	✓	

C-90

Rebar Anchor (2 Persons)

- * Suitable for anchoring from Ø 20-40 mm rebars.
- * Hot dipped galvanized coating.
- * Suitable for 2 people.



Ordering Information

Order Code	Product Name		Material	Standard		Weight (Gr/Pcs)
	Product Name	Product Description		EN795 Type B	CEN/TS 16415 Type B	
C90G010	C-90	Rebar Anchor	Galvanized	✓	✓	4.395 g

AC-400

Adjustable Pole Climber– Wooden Poles



- * Developed for wooden poles.
- * Enables electricians to climb wooden poles safely.
- * Adjustable.
- * Adjusting with the adjustment peg is very easy and practical, adjustments can be made even while on the pole.
- * Compatible with all poles measuring 180-360 mm.
- * Single use (150 kg),
- * Base steel is coated with cataphoresis. The grip handle is made of galvanized steel material.

Weight : 4,80 kg (1 Set)

Standard: DIN 48345 (4.5), DIN ISO 2768-1, DIN 55928-5, EN ISO 5579

AC-400 B

Adjustable Pole Climber– Concrete Poles



- * Developed for concrete poles.
- * Enables electricians to climb concrete poles safely.
- * Adjustable.
- * Adjusting with the adjustment peg is very easy and practical, adjustments can be made even while on the pole.
- * Compatible with all poles measuring 180-360 mm.
- * Single use (150 kg).
- * Base steel is coated with cataphoresis. The grip handle is made of galvanized steel material.

Weight : 6,60 kg (1 Set)

Standard: DIN 48345 (4.5), DIN ISO 2768-1, DIN 55928-5, EN ISO 5579





HARNESSES



ARGA® The Safest
SAFETY Way of
Working at Height

argasafety.com

DRAGON FAST COMFORT

Fall Arrest and Work Positioning Harness (Suspension)



1. **SOFT TOUCH** feature provides comfort in areas in contact with the neck.



2. **ALU TECH** technology has indicator feature. Has aluminum alloy automatic buckles that do not open under load.



3. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



4. **ALUMINUM D RINGS** outward facing aluminum alloy D rings that provide ease of use.



5. **FALL INDICATOR** located on the back and chest.



6. **SPLINT PAD** special system that supports the waist within the waist pad. Shoulder, waist, and leg pads have breathable features that prevent sweating.



Ordering Information

Order Code	Size			D Ring				Pads			Trauma Sling	Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg		EN361	EN358	EN813	
0C15A10	✓			✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	2.400 g
0C15A11		✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	2.445 g
0C15A12			✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	2.474 g
0C15A14	✓			✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	2.505 g
0C15A15		✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	2.550 g
0C15A16			✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	2.579 g

DRAGON FAST

Fall Arrest and Work Positioning Harness (Suspension)



1. **ALU-TECH** technology has indicator feature. Has aluminum alloy automatic buckles that do not unlock under load.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



3. **ALUMINUM D RINGS** outward facing aluminum alloy D rings that provide ease of use.



4. **FALL INDICATOR** located on the back and chest.



5. **SPLINT PAD** special system that supports the waist within the waist pad. Shoulder, waist, and leg pads have breathable features that prevent sweating.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



150
Kg



Ordering Information

Order Code	Size				D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813		
0015A10	✓			✓	✓	✓	✓		✓		✓	✓	✓	✓	2.193 g
0015A11		✓		✓	✓	✓	✓		✓		✓	✓	✓	✓	2.227 g
0015A12			✓	✓	✓	✓	✓		✓		✓	✓	✓	✓	2.256 g

DRAGON COMFORT

Fall Arrest and Work Positioning Harness (Suspension)



1. **EASY-TECH** technology, easily adjustable steel alloy automatic buckles that do not unlock under load.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



3. **ALUMINUM D RINGS** outward facing aluminum alloy D rings that provide ease of use.



4. **FALL INDICATOR** located on the back and chest.



5. **SPLINT PAD** special system that supports the waist within the waist pad. Shoulder, waist, and leg pads have breathable features that prevent sweating.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



150 Kg



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	
0C15010	✓			✓	✓	✓	✓		✓	✓	✓	✓	✓	2.315 g
0C15011		✓		✓	✓	✓	✓		✓	✓	✓	✓	✓	2.351 g
0C15012			✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	2.380 g

DRAGON

Fall Arrest and Work Positioning Harness (Suspension)



1. **EASY-TECH** technology, easily adjustable steel alloy automatic buckles.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



3. **ALUMINUM D RINGS** outward facing aluminum alloy D rings that provide ease of use.



4. **FALL INDICATOR** located on the back and chest.



5. **SPLINT PAD** special system that supports the waist within the waist pad. Waist pads have breathable features that prevent sweating.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size				D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813		
0015010	✓			✓	✓	✓	✓		✓		✓	✓	✓	✓	2.114 g
0015011		✓		✓	✓	✓	✓		✓		✓	✓	✓	✓	2.148 g
0015012			✓	✓	✓	✓	✓		✓		✓	✓	✓	✓	2.175 g

CAPELLA FAST COMFORT

Fall Arrest and Work Positioning Harness



1. ALU-TECH technology has indicator feature. Has aluminum alloy automatic buckles that do not unlock under load.



2. LANYARD PARKING LOOP crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



3. ALUMINUM D RINGS outward facing aluminum alloy D rings that provide ease of use.



4. FALL INDICATOR located on the back and chest.



5. SPLINT PAD special system that supports the waist within the waist pad. Shoulder, waist, and leg pads have breathable features that prevent sweating.



6. LABEL PROTECTOR label protective case for periodic control and product tracking.



7. BONDED type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
0C14A10	✓			✓	✓	✓	✓		✓		✓	✓	✓	2.120 g
0C14A11		✓		✓	✓	✓	✓		✓		✓	✓	✓	2.140 g
0C14A12			✓	✓	✓	✓	✓		✓		✓	✓	✓	2.180 g



CAPELLA FAST

Fall Arrest and Work Positioning Harness



1. **ALU-TECH** technology has indicator feature. Has aluminum alloy automatic buckles that do not unlock under load.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



3. **ALUMINUM D RINGS** outward facing aluminum alloy D rings that provide ease of use.



4. **FALL INDICATOR** located on the back and chest.



5. **SPLINT PAD** special system that supports the waist within the waist pad. Waist pads have breathable features that prevent sweating.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size				D Ring				Pads				Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813			
0014A10	✓			✓	✓	✓			✓		✓	✓				1.898 g
0014A11		✓		✓	✓	✓			✓		✓	✓				1.920 g
0014A12			✓	✓	✓	✓			✓		✓	✓				1.960 g

DAKOTA FAST COMFORT

Fall Arrest Harness



1. ALU-TECH technology has indicator feature. Has aluminum alloy automatic buckles that do not unlock under load.



2. LANYARD PARKING LOOP crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



3. ALUMINUM D RINGS outward facing aluminum alloy D rings that provide ease of use.



4. FALL INDICATOR located on the back and chest.



5. BREATHABLE, Anti-sweat and breathable shoulder and leg pads.



6. LABEL PROTECTOR label protective case for periodic control and product tracking.



7. BONDED type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



150 Kg



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
0C12A10	✓			✓	✓			✓		✓	✓			1.450 g
0C12A11		✓		✓	✓			✓		✓	✓			1.470 g
0C12A12			✓	✓	✓			✓		✓	✓			1.504 g

DAKOTA FAST

Fall Arrest Harness



1. **ALU-TECH** technology has indicator feature. Has aluminum alloy automatic buckles that do not unlock under load.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality. It has a self-opening feature under force.



3. **ALUMINUM D RINGS** outward facing aluminum alloy D rings that provide ease of use.



4. **FALL INDICATOR** located on the back and chest.



5. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



6. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	
0012A10	✓			✓	✓						✓			1.258 g
0012A11		✓		✓	✓						✓			1.280 g
0012A12			✓	✓	✓						✓			1.310 g



WOLF FAST COMFORT

Fall Arrest and Work Positioning Harness (Suspension)



1. **STEEL-TECH** technology, steel alloy automatic buckles with indicator feature.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back and abdomen, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic shoulder, waist and leg pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
EC15A10	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2.340 g
EC15A11		✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2.375 g
EC15A12			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2.400 g

WOLF FAST

Fall Arrest and Work Positioning Harness (Suspension)



1. **STEEL-TECH** technology, steel alloy automatic buckles with indicator feature.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back and abdomen, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic waist pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size				D Ring			Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	
EC15A10	✓			✓	✓	✓	✓		✓		✓	✓	✓	2.179 g
EC15A11		✓		✓	✓	✓	✓		✓		✓	✓	✓	2.210 g
EC15A12			✓	✓	✓	✓	✓		✓		✓	✓	✓	2.239 g

WOLF COMFORT

Fall Arrest and Work Positioning Harness (Suspension)



1. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back and abdomen, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic waist pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
EC15010	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2.025 g
EC15011		✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2.058 g
EC15012			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	2.087 g

WOLF

Fall Arrest and Work Positioning Harness (Suspension)



1. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back and abdomen, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic waist pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.




Ordering Information

Order Code	Size				D Ring			Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	
E015010	✓			✓	✓	✓	✓		✓		✓	✓	✓	1.890 g
E015011		✓		✓	✓	✓	✓		✓		✓	✓	✓	1.921 g
E015012			✓	✓	✓	✓	✓		✓		✓	✓	✓	1.950 g

SPARK FAST COMFORT

Fall Arrest and Work Positioning Harness



1. **STEEL-TECH** technology, steel alloy automatic buckles with indicator feature.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic waist pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	
EC15010	✓			✓	✓	✓		✓	✓	✓	✓	✓	✓	2.082 g
EC15011		✓		✓	✓	✓		✓	✓	✓	✓	✓	✓	2.104 g
EC15012			✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	2.144 g

SPARK FAST

Fall Arrest and Work Positioning Harness



1. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



2. LANYARD PARKING LOOP crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. WELDLESS solid steel alloy D rings (large D on back, small D on chest and bended D ring on waist pad).



4. FALL INDICATOR located on the back and chest.



5. COMFORT ergonomic waist pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
E014A10	✓			✓	✓	✓			✓		✓	✓		1.897 g
E014A11		✓		✓	✓	✓			✓		✓	✓		1.919 g
E014A12			✓	✓	✓	✓			✓		✓	✓		1.959 g

SPARK COMFORT

Fall Arrest and Work Positioning Harness



1. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic waist pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
EC14010	✓			✓	✓	✓		✓	✓	✓	✓	✓	✓	2.076 g
EC14011		✓		✓	✓	✓		✓	✓	✓	✓	✓	✓	2.098 g
EC14A12			✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	2.138 g

SPARK

Fall Arrest and Work Positioning Harness



1. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic waist pad.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size				D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813		
E014010	✓			✓	✓	✓			✓		✓	✓			1.610 g
E014011		✓		✓	✓	✓			✓		✓	✓			1.630 g
E014012			✓	✓	✓	✓			✓		✓	✓			1.670 g



ORION FAST COMFORT

Fall Arrest Harness



1. **STEEL-TECH** technology, steel alloy automatic buckles with indicator feature.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back, small D on chest and bended D ring on waist pad).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic waist pad.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



150 Kg



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
EC12A10	✓			✓	✓			✓		✓	✓			1.500 g
EC12A11		✓		✓	✓			✓		✓	✓			1.520 g
EC12A12			✓	✓	✓			✓		✓	✓			1.555 g

ORION FAST

Fall Arrest Harness



1. **STEEL-TECH** technology, steel alloy automatic buckles with indicator feature.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back and small D on chest).



4. **FALL INDICATOR** located on the back and chest.



5. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



6. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	
E012A10	✓			✓	✓						✓			1.360 g
E012A11		✓		✓	✓						✓			1.380 g
E012A12			✓	✓	✓						✓			1.415 g

ORION COMFORT

Fall Arrest Harness



1. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back and small D on chest).



4. **FALL INDICATOR** located on the back and chest.



5. **COMFORT** ergonomic shoulder and leg pads.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.



150 Kg



Ordering Information

Order Code	Size				D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)	
EC12010	✓			✓	✓			✓		✓	✓				1.254 g
EC12011		✓		✓	✓			✓		✓	✓				1.276 g
EC12012			✓	✓	✓			✓		✓	✓				1.309 g

ORION

Fall Arrest Harness



1. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



2. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



3. **WELDLESS** solid steel alloy D rings (large D on back and small D on chest).



4. **FALL INDICATOR** located on the back and chest.



5. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



6. **BONDED** type U.V. resistant and contrast sewing threads that are extremely resistant to outdoor conditions.




Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	
E012010	✓			✓	✓						✓			1.125 g
E012011		✓		✓	✓						✓			1.147 g
E012012			✓	✓	✓						✓			1.180 g

ORION FAST FR

Fall Arrest Harness (Welder)



1. **ARAMID** made of 100% Aramid material (heat-resistant).



2. **STEEL-TECH** technology, steel alloy automatic buckles with indicator feature.



3. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



4. **WELDLESS** solid steel alloy D rings (large D on back and small D on chest).



5. **FALL INDICATOR** located on the back and chest.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **SEWING THREAD** is made of 100% Aramid material. High strength and heat resistant.




Ordering Information

Order Code	Size			D Ring				Pads			Standard			Weight
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813	(Gr/Pcs)
EA12A10	✓			✓	✓						✓			1.290 g
EA12A11		✓		✓	✓						✓			1.315 g
EA12A12			✓	✓	✓						✓			1.345 g

ORION FR

Fall Arrest Harness (Welder)



1. **ARAMID** made of 100% Aramid material (heat-resistant).



2. Steel alloy buckles with **INLOCK-TECH** feature, which can be easily adjusted by interlocking.



3. **LANYARD PARKING LOOP** crafted to ensure the optimal positioning of a lanyard on the harness, providing convenience and functionality.



4. **WELDLESS** solid steel alloy D rings (large D on back and small D on chest).



5. **FALL INDICATOR** located on the back and chest.



6. **LABEL PROTECTOR** label protective case for periodic control and product tracking.



7. **SEWING THREAD** is made of 100% Aramid material. High strength and heat resistant.



Learn more

Watch the overview

Ordering Information

Order Code	Size				D Ring				Pads			Standard			Weight (Gr/Pcs)
	XS/S	M/L	XL	Back	Chest	Waist	Abdominal	Shoulder	Waist	Leg	EN361	EN358	EN813		
EA12010	✓			✓	✓						✓				1.055 g
EA12011		✓		✓	✓						✓				1.077 g
EA12012			✓	✓	✓						✓				1.110 g

COBOLT

Miner Harness



1. **ALU-TECH** technology has indicator feature. Has aluminum alloy automatic buckles that do not unlock under load.



2. High-strength polyester woven webbing covered with leather.



5. **SPLINT PAD** special system that supports the waist within the waist pad. Shoulder, waist, and leg pads have breathable features that prevent sweating.



4. D ring on waist pad for space limitation.



5. Adjustable carrying pocket on the left and right of the waist pad for material handling.



6. Material handling loop.



Ordering Information

Order Code	Size			D Ring	Pads	Weight (Gr/Pcs)
	XS/S	M/L	XL			
MC11A10	✓			✓	✓	635 g
MC11A11		✓		✓	✓	658 g
MC11A12			✓	✓	✓	680 g



Learn more



Watch the overview

HOBBIT

Miner Harness



1. Tongue Buckle.



2. D ring on waist pad for space limitation.



3. Adjustable carrying pocket on the left and right of the waist pad for material handling adjustable carrying.



Ordering Information

Order Code	Size			D Ring	Pads	Weight (Gr/Pcs)
	XS/S	M/L	XL			
M011010	✓			✓	✓	541 g
M011011		✓		✓	✓	561 g
M011012			✓	✓	✓	581 g



ST-07

Anti-Trauma Sling




1. Easy attachment to all type of safety harnesses.



2. Zippered protection case.



3. If the suspended person is still conscious after a fall, adjusts the length of the sling according to his / her height to avoid suspension trauma.

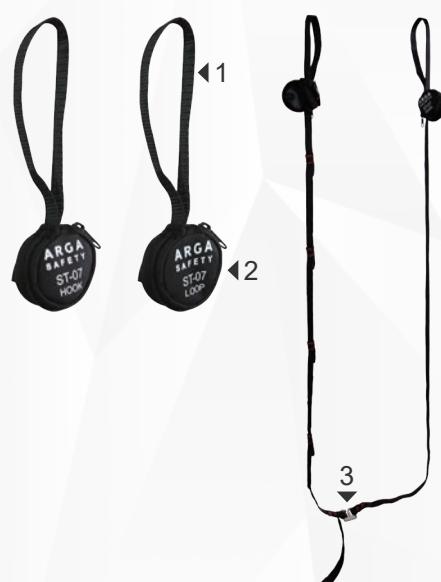

Ordering Information

Order Code	Weight
	(Gr/Pcs)
ST07000	105 g



HERO R


Tool Holder (With rope end)



1. Elastic Webbing.



2. Thin rope end.

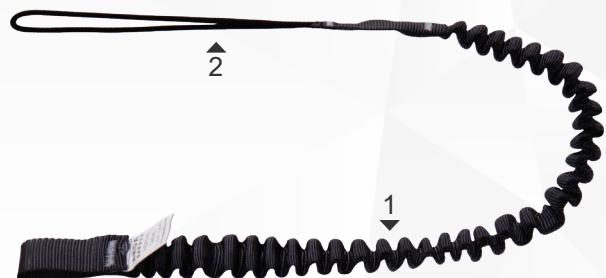

Ordering Information

Order Code	Weight (Gr/Pcs)
HR10100	48 g



HERO W

Tool Holder (With webbing end)



1. Elastic Webbing.



2. Webbing end.



Ordering Information

Order Code	Weight (Gr/Pcs)
HW10100	51 g





LANYARDS



ARGA®
SAFETY The Safest
Way of
Working at Height

 argasafety.com

ZUMA I

Single Leg Shock Absorbing Lanyards



ZUMA I



ZUMA I 17



ZUMA I 53



ZUMA I 60



ZUMA I 85



ZUMA I 110



Technical Specifications

- * Suitable for horizontal use, with sharp edge protection (RfU11.074 AT).
- * The shock absorber opens gradually in the event of a fall ensuring that the load on the user remains below 6 kN.
- * Manufactured from high strength Ø 11 mm standard static rope complies with EN 1891.
- * Transparent protection with reflector feature that protects the carrier stitches at the ends of the lanyard.
- * Bag type protection case protects shock absorbing system and periodic control labels against U.V and dust.
- * High-strength polyester protection cover that protects the lanyard arm against external influences and friction.
- * Bonded type U.V. and contrast sewing threads resistant to the external environment.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard			Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT	
00ZI00013	ZUMA I	Single Leg Shock Absorbing Lanyard	1,30 mt			✓		✓	699 g
00ZI01720	ZUMA I 17	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	OKS-17 S	✓	✓	✓	755 g
00ZI05313	ZUMA I 53	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSS-53	✓	✓	✓	1.059 g
00ZI05320	ZUMA I 53	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓	✓	1.115 g
00ZI06013	ZUMA I 60	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-60	✓	✓	✓	982 g
00ZI06020	ZUMA I 60	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓	✓	1.035 g
00ZI08513	ZUMA I 85	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-85	✓	✓	✓	1.355 g
00ZI08520	ZUMA I 85	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-85	✓	✓	✓	1.110 g
00ZI11013	ZUMA I 110	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-110	✓	✓	✓	1.480 g
00ZI11020	ZUMA I 110	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-110	✓	✓	✓	1.535 g

ZUMA Y

Double Leg Shock Absorbing Lanyards



ZUMA Y

ZUMA Y 17

ZUMA Y 53

ZUMA Y 60

ZUMA Y 85

ZUMA Y 110



Technical Specifications

- * Suitable for horizontal use, with sharp edge protection (RfU11.074 AT).
- * The shock absorber opens gradually in the event of a fall ensuring that the load on the user remains below 6 kN.
- * Manufactured from high strength Ø 11 mm standard static rope complies with EN 1891.
- * Transparent protection with reflector feature that protects the carrier stitches at the ends of the lanyard.
- * Bag type protection case protects shock absorbing system and periodic control labels against U.V and dust.
- * Bonded type U.V. and contrast sewing threads resistant to the external environment.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard			Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT	
00ZY00013	ZUMA Y	Double Leg Shock Absorbing Lanyard	1,30 mt			✓		✓	999 g
00ZY01720	ZUMA Y 17	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	OKS-17 S	✓	✓	✓	1.112 g
00ZY05313	ZUMA Y 53	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSS-53	✓	✓	✓	1.644 g
00ZY05320	ZUMA Y 53	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓	✓	1.755 g
00ZY06013	ZUMA Y 60	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-60	✓	✓	✓	1.570 g
00ZY06020	ZUMA Y 60	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓	✓	1.683 g
00ZY08513	ZUMA Y 85	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-85	✓	✓	✓	2.320 g
00ZY08520	ZUMA Y 85	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-85	✓	✓	✓	2.430 g
00ZY11013	ZUMA Y 110	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-110	✓	✓	✓	2.560 g
00ZY11020	ZUMA Y 110	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-110	✓	✓	✓	2.675 g

PARS I

Single Leg Shock Absorbing Lanyards



PARS I



PARS I 17



PARS I 53



PARS I 60



PARS I 85



PARS I 110



Technical Specifications

- * Vertical usage feature that provides comfort for the user.
- * The shock absorber opens gradually in the event of a fall, ensuring that the load on the user remains below 6 kN.
- * Lanyard is made of high-strength 45 mm wide polyester webbing.
- * Bag type protection case protects shock absorbing system and periodic control labels against U.V and dust.
- * Bonded type U.V. and contrast sewing threads resistant to the external environment.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information						Standard			Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT		
00PI00013	PARS I	Single Leg Shock Absorbing Lanyard	1,30 mt			✓				660 g
00PI01720	PARS I 17	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	OKS-17 S	✓	✓			710 g
00PI05313	PARS I 53	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSS-53	✓	✓			800 g
00PI05320	PARS I 53	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓			853 g
00PI06013	PARS I 60	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-60	✓	✓			941 g
00PI06020	PARS I 60	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓			993 g
00PI08513	PARS I 85	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-85	✓	✓			1.335 g
00PI08520	PARS I 85	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-85	✓	✓			1.387 g
00PI11013	PARS I 110	Single Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-110	✓	✓			1.445 g
00PI11020	PARS I 110	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-110	✓	✓			1.497 g

LINE I

Single Leg Lanyards



LINE I



LINE I 17



LINE I 53



LINE I 60



LINE I 85



LINE I 110

**Technical Specifications**

- * Vertical use feature providing comfort for the user.
- * Lanyard keeps the user suspended in case of a fall, so must be used with a shock absorbing lanyard.
- * Lanyard is made of high strength 45 mm wide polyester webbing.
- * Bonded type U.V. & contrast sewing threads resistant to external environment.
- * Supplied in a carrying case.

Ordering Information

Order Code	Product Information					Standard			Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Shock Absorbing Bottom End Carabiner	Lanyard Top End Carabiner	EN354	EN362	RfU11.074 AT	
00LI00013	LINE I	Single Leg Lanyard	1,30 mt			✓			660 g
00LI01720	LINE I 17	Single Leg Lanyard	2,00 mt	OKS-17 S	OKS-17 S	✓	✓		710 g
00LI05313	LINE I 53	Single Leg Lanyard	1,30 mt	OKS-17 S	DSS-53	✓	✓		800 g
00LI05320	LINE I 53	Single Leg Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓		853 g
00LI06013	LINE I 60	Single Leg Lanyard	1,30 mt	OKS-17 S	DSA-60	✓	✓		941 g
00LI06020	LINE I 60	Single Leg Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓		993 g
00LI08513	LINE I 85	Single Leg Lanyard	1,30 mt	OKS-17 S	DSA-85	✓	✓		1.335 g
00LI08520	LINE I 85	Single Leg Lanyard	2,00 mt	OKS-17 S	DSA-85	✓	✓		1.387 g
00LI11013	LINE I 110	Single Leg Lanyard	1,30 mt	OKS-17 S	DSA-110	✓	✓		1.445 g
00LI11020	LINE I 110	Single Leg Lanyard	2,00 mt	OKS-17 S	DSA-110	✓	✓		1.497 g

PARS Y

Double Leg Shock Absorbing Lanyards



Technical Specifications

- * Vertical usage feature that provides comfort for the user.
- * The shock absorber opens gradually in the event of a fall, ensuring that the load on the user remains below 6 kN.
- * Lanyard is made of high-strength 45 mm wide polyester webbing.
- * Bag type protection case protects shock absorbing system and periodic control labels against U.V and dust.
- * Bonded type U.V. and contrast sewing threads resistant to the external environment.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard			Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT	
00PY00013	PARS Y	Double Leg Shock Absorbing Lanyard	1,30 mt			✓			468 g
00PY01720	PARS Y 17	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	OKS-17 S	✓	✓		917 g
00PY05313	PARS Y 53	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSS-53	✓	✓		1.602 g
00PY05320	PARS Y 53	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓		1.1706 g
00PY06013	PARS Y 60	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-60	✓	✓		1.490 g
00PY06020	PARS Y 60	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓		1.595 g
00PY08513	PARS Y 85	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-85	✓	✓		2.250 g
00PY08520	PARS Y 85	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-85	✓	✓		2.237 g
00PY11013	PARS Y 110	Double Leg Shock Absorbing Lanyard	1,30 mt	OKS-17 S	DSA-110	✓	✓		2.420 g
00PY11020	PARS Y 110	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-110	✓	✓		2.525 g

PARS I FR

Single Leg Shock Absorbing Lanyards (Welder)



PARS FR I 53



PARS FR I 60



Technical Specifications

- * Lanyard is made of 100% Aramid (Heat resistant) woven webbing.
- * Bag type protection cover is made of 100% Aramid (heat resistant) fabric.
- * Sharp edge protection for horizontal use (RfU11.074 AT).
- * The shock absorber opens gradually in the event of a fall, ensuring that the load on the user remains below 6 kN.
- * Heat resistant 100% Aramid contrast sewing threads.
- * Label protective cover for periodic control and product tracking.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard			Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT	
0FRI05315	PARS FR I 53	Single Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSS-53	✓	✓		1.435 g
0FRI05320	PARS FR I 53	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓		1.481 g
0FRI06015	PARS FR I 60	Single Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSA-60	✓	✓		1.381 g
0FRI06020	PARS FR I 60	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓		1.426 g

PARS Y FR

Double Leg Shock Absorbing Lanyards (Welder)



PARS FR Y 53



PARS FR Y 60



Technical Specifications


- * Lanyard is made of 100% Aramid (Heat resistant) woven webbing.
- * Bag type protection cover is made of 100% Aramid (heat resistant) fabric.
- * Sharp edge protection for horizontal use (RfU11.074 AT).
- * The shock absorber opens gradually in the event of a fall, ensuring that the load on the user remains below 6 kN.
- * Heat resistant 100% Aramid contrast sewing threads.
- * Label protective cover for periodic control and product tracking.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard			Weight (Gr/Pcs)
	Product Name	Product Information	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT	
0FRY05315	PARS FR Y 53	Double Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSS-53	✓	✓		1.972 g
0FRY05320	PARS FR Y 53	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓		2.062 g
0FRY06015	PARS FR Y 60	Double Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSA-60	✓	✓		1.896 g
0FRY06020	PARS FR Y 60	Double Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓		1.986 g

FLEXTRA 140 D - I

Single Leg Shock Absorbing Lanyards

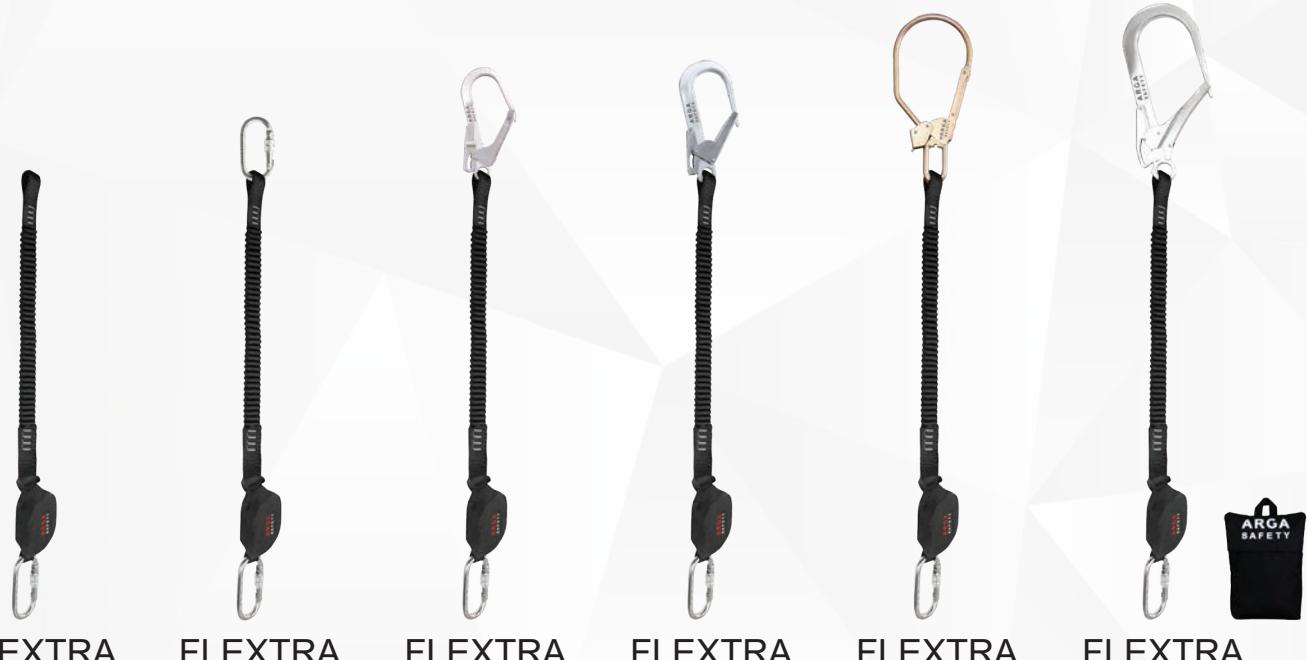FLEXTRA
140 D - IFLEXTRA
140 D - I 17FLEXTRA
140 D - I 53FLEXTRA
140 D - I 60FLEXTRA
140 D - I 85FLEXTRA
140 D - I 110

Technical Specifications

- * More comfortable working thanks to its elastic feature.
- * Sharp edge protection for horizontal use (RfU11.074 AT).
- * The shock absorber (20 mm Dyneama) opens gradually in the event of a fall, ensuring that the load on the user remains below 6 kN.
- * Lanyard is made of high-strength polyester woven webbing.
- * Bag type protection protects the shock absorbing system and periodic control labels against U.V and dust.
- * Bonded type U.V. and contrast sewing threads resistant to the external environment.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard			Weight
	Product Name	Product Type	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT	(Gr/Pcs)
00FI05315	FLEXTRA 140 D - I 53	Single Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSS-53	✓	✓	✓	1.159 g
00FI05315	FLEXTRA 140 D - I 53	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓	✓	1.183 g
00FI06015	FLEXTRA 140 D - I 60	Single Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSA-60	✓	✓	✓	1.132 g
00FI06020	FLEXTRA 140 D - I 60	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓	✓	1.169 g

FLEXTRA 140 D - Y

Double Leg Shock Absorbing Lanyards



Technical Specifications

- * More comfortable working thanks to its elastic feature.
- * Sharp edge protection for horizontal use (RfU11.074 AT).
- * The shock absorber (20 mm Dyneama) opens gradually in the event of a fall, ensuring that the load on the user remains below 6 kN.
- * Lanyard is made of high-strength polyester woven webbing.
- * Bag type protection protects the shock absorbing system and periodic control labels against U.V and dust.
- * Bonded type U.V. and contrast sewing threads resistant to the external environment.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard			Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Shock Absorber Carabiner	Lanyard Carabiner	EN355	EN362	RfU11.074 AT	
00FY05315	FLEXTRA 140 D Y 53	Single Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSS-53	✓	✓	✓	1.590 g
00FY05315	FLEXTRA 140 D Y 53	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSS-53	✓	✓	✓	1.620 g
00FY06015	FLEXTRA 140 D Y 60	Single Leg Shock Absorbing Lanyard	1,50 mt	OKS-17 S	DSA-60	✓	✓	✓	1.490 g
00FY06020	FLEXTRA 140 D Y 60	Single Leg Shock Absorbing Lanyard	2,00 mt	OKS-17 S	DSA-60	✓	✓	✓	1.520 g

WAYA

Work Positioning Lanyards (Adjustable)



WAYA



WAYA 14

WAYA 17

WAYA 28/1

WAYA 28/2

**Technical Specifications**

- * Provides free use of hands when working at an angle.
- * Specially designed adjustment mechanism that provides ease of use.
- * Made of high strength Ø 12 mm static rope that complies with EN 1891 standard.
- * Transparent protection case with reflector feature that protects the stitches on the lanyard ends.
- * Transparent label protective cover for periodic control and product tracking.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard		Weight
	Product Name	Product Type	Length (mt)	Lanyard Carabiner	Rope Grab Carabiner	EN355	EN362	(Gr/Pcs)
W000002	WAYA	Work Positioning Lanyard (Adjustable)	2,00 mt			✓		503 g
W000003	WAYA	Work Positioning Lanyard (Adjustable)	3,00 mt			✓		595 g
W017002	WAYA 17	Work Positioning Lanyard (Adjustable)	2,00 mt	OKS-17 S	OKS-17 S	✓	✓	819 g
W014003	WAYA 17	Work Positioning Lanyard (Adjustable)	3,00 mt	OKS-17 S	OKS-17 S	✓	✓	917 g
W014002	WAYA 14	Work Positioning Lanyard (Adjustable)	2,00 mt	OKS-14 T	OKS-14 T	✓	✓	924 g
W014003	WAYA 14	Work Positioning Lanyard (Adjustable)	3,00 mt	OKS-14 T	OKS-14 T	✓	✓	1.016 g
W028102	WAYA 28/1	Work Positioning Lanyard (Adjustable)	2,00 mt	DSA-28	OKS-14 S	✓	✓	841 g
W028103	WAYA 28/1	Work Positioning Lanyard (Adjustable)	3,00 mt	DSA-28	OKS-14 S	✓	✓	933 g
W028202	WAYA 28/2	Work Positioning Lanyard (Adjustable)	2,00 mt	DSA-28	OKS-14 T	✓	✓	894 g
W028203	WAYA 28/2	Work Positioning Lanyard (Adjustable)	3,00 mt	DSA-28	OKS-14 T	✓	✓	986 g

WAYA L

Work Positioning Lanyards with Lock (Adjustable)



WAYA L



WAYA L 14

WAYA L 17

WAYA L 28/1

WAYA L 28/2



Learn more



Watch the overview

Technical Specifications

- * Allows free use of hands when working at an angle.
- * Specially designed adjustment mechanism that provides ease of use.
- * When engaging with tree poles, it secures and terminates the descent in the event of a fall.
- * Manufactured from high strength Ø 12 mm static rope complies with EN 1891 standards.
- * Transparent protection case with reflector feature that protects the stitches on the lanyard ends.
- * Transparent label protective case for periodic control and product tracking.
- * Transported in a carrying bag.

Ordering Information

Order Code	Product Information					Standard		Weight (Gr/Pcs)
	Product Name	Product Type	Length (mt)	Lanyard Carabiner	Rope Grab Carabiner	EN355	EN362	
WL00002	WAYA	Work Positioning Lanyard (Adjustable)	2,00 mt			✓		896 g
WL00003	WAYA	Work Positioning Lanyard (Adjustable)	3,00 mt			✓		988 g
WL17002	WAYA 17	Work Positioning Lanyard (Adjustable)	2,00 mt	OKS-17 S	OKS-17 S	✓	✓	1.207 g
WL14003	WAYA 17	Work Positioning Lanyard (Adjustable)	3,00 mt	OKS-17 S	OKS-17 S	✓	✓	1.299 g
WL14002	WAYA 14	Work Positioning Lanyard (Adjustable)	2,00 mt	OKS-14 T	OKS-14 T	✓	✓	1.311 g
WL14003	WAYA 14	Work Positioning Lanyard (Adjustable)	3,00 mt	OKS-14 T	OKS-14 T	✓	✓	1.403 g
WL28102	WAYA 28/1	Work Positioning Lanyard (Adjustable)	2,00 mt	DSA-28	OKS-14 S	✓	✓	1.178 g
WL28103	WAYA 28/1	Work Positioning Lanyard (Adjustable)	3,00 mt	DSA-28	OKS-14 S	✓	✓	1.270 g
WL28202	WAYA 28/2	Work Positioning Lanyard (Adjustable)	2,00 mt	DSA-28	OKS-14 T	✓	✓	1.290 g
WL28203	WAYA 28/2	Work Positioning Lanyard (Adjustable)	3,00 mt	DSA-28	OKS-14 T	✓	✓	1.360 g



CARABINERS



ARGA[®]
SAFETY

The Safest
Way of
Working at Height

 argasafety.com

OKA-18 T

Aluminum Oval Automatic Carabiner

- * Provides a safe connection between equipment.
- * Made of aluminum alloy material.
- * Automatic locking (3-movement) system.
- * Does not get stuck thanks to key-lock design.
- * Oval structure distributes the load equally on the vertical axis.
- * Mouth opening is 18 mm.
- * Bearing strength is 23 kN.



Key-lock



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KAT0010	OKA-18 T	Aluminum Oval Automatic Locking Carabiner	25 kN	Aluminum	Automatic	18 mm	✓	86 g

OKS-14 T

Steel Oval Automatic Carabiner

- * Provides a safe connection between equipment.
- * Made of forged steel material.
- * Automatic locking (3-movement) system.
- * Oval structure distributes the load equally on the vertical axis.
- * Mouth opening is 14 mm.
- * Bearing strength is 25 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KST0010	OKS-14 T	Steel Oval Automatic Locking Carabiner	25 kN	Steel	Automatic	14 mm	✓	215 g

OKS-17 S

Steel Oval Type Carabiner

- * Provides a safe connection between equipment.
- * Made of steel material.
- * Screw locking system.
- * Oval structure distributes the load equally on the vertical axis.
- * Mouth opening is 17 mm.
- * Bearing strength is 23 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KSV0010	OKS-17 S	Steel Oval Automatic Locking Carabiner	23 kN	Steel	Screw	17 mm	✓	169 g

HKS-22 T

Steel HMS Carabiner

- * Provides a safe connection between equipment.
- * Made of steel alloy material.
- * Automatic locking (3-movement) system.
- * HMS type wide connection surface allows the connection of more than one material.
- * Mouth opening is 22 mm.
- * Bearing strength is 23 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KST0020	HKS-22 T	Steel HMS Type Automatic Locking Carabiner	45 kN	Steel	Automatic	22 mm	✓	288 g

DSS-53

Double Safety Carabiner (Steel)

- * Provides a safe connection between equipment.
- * Made of forged steel material.
- * Double safety locking system.
- * Mouth opening is 51 mm.
- * Bearing strength is 23 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KSD0053	DSS-53	Double Safety Carabiner	23 kN	Steel	Double Safety	51 mm	✓	500 g

DSA-28

Double Safety Carabiner

- * Provides a safe connection between equipment.
- * Made of aluminum alloy material.
- * Double safety locking system.
- * Mouth opening is 28 mm.
- * Bearing strength is 23 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KAD0028	DSA-28	Double Safety Carabiner	23 kN	Aluminum	Double Safety	28 mm	✓	130 g

DSA-60

Double Safety Carabiner (Aluminum)

- * Provides a safe connection between equipment.
- * Made of aluminum material.
- * Double safety locking system.
- * Mouth opening is 28 mm 60 mm.
- * Bearing strength is 23 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KAD0060	DSA-60	Double Safety Carabiner	23 kN	Aluminum	Double Safety	60 mm	✓	460 g

DSS-85

Double Safety Carabiner (Steel)

- * Provides a safe connection between equipment.
- * Made of steel material.
- * Double safety locking system.
- * Mouth opening is 85 mm.
- * Bearing strength is 23 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KSD0085	DSS-85	Double Safety Carabiner	23 kN	Steel	Double Safety	85 mm	✓	846 g

DSA-110

Double Safety Carabiner (Aluminum)

- * Provides a safe connection between equipment.
- * Made of aluminum material.
- * Double safety locking system.
- * Mouth opening is 110 mm .
- * Bearing strength is 23 kN.



Ordering Information

Order Code	Product Information		Specifications				Standard	Weight (Gr/Pcs)
	Product Name	Product Type	Strength	Material	Locking	Mount Opening (mm)		
KAD0110	DSA-110	Double Safety Carabiner	23 kN	Aluminum	Double Safety	110 mm	✓	930 g





SHARP EDGE PROTECTED RETRACTABLE FALL ARRESTERS



ARGA
SAFETY

The Safest
Way of
Working at Height

 argasafety.com

ARES SRL- 2 W EDGE

Retractable Fall Arrester (Sharp Edge Protected)

- * It has sharp edge protection and is suitable for horizontal use (CNB/P/11.060 sharp edge test CNB/P/11.085 Factor 2).
- * UHMWPE high strength 19 mm webbing
- * 360° rotating swivel anchor eye.
- * Compact lightweight design.
- * Impact resistant, thermoplastic outer body.
- * The shock absorber located outside the body keeps the impact force on the user below 6 kN.
- * Double safety carabiner with indicator feature.
- * 140 kg working capacity.
- * 2 meter working length.



Ordering Information

Order Code	Product Details		Specifications					Standard		Weight
	Product Name	Product Type	Length	Material	Webbing	Carabiner	Anchor Carabiner	EN360	CNB/P/11.060	(Gr/Pcs)
ASRL02SW	ARES SRL- 2 W EDGE	Retractable Fall Arrester	UHMWPE	Galvanized Steel Rope	19 mm	Double Safety Steel with Indicator	To be indicated on the order	✓	✓	830 g

ARES SRL- 15 S EDGE

Retractable Fall Arrester (Sharp Edge Protected)

- * Has sharp edge protection and is suitable for horizontal use (CNB/P/11.060).
- * Aluminum alloy 360° rotating swivel anchor eye.
- * Compact lightweight design.
- * The spring-loaded rubber chamber prevents locking when it retracts.
- * Impact resistant, thermoplastic outer body.
- * Integrated shock absorber reduces the force on the load to less than 6 kN.
- * Double safety carabiner with indicator feature.
- * Ø 4.8 mm thick galvanized steel rope.
- * 140 kg working capacity.
- * 15 meters working length.




Ordering Information

Order Code	Product Details		Specifications					Standard		Weight
	Product Name	Product Type	Length	Material	Rope Dia(Ø)	Carabiner	Anchor Carabiner	EN360	CNB/P/11.060	(Gr/Pcs)
ASRL15SE	ARES SRL- 15 S EDGE	Retractable Fall Arrester	15 m	Galvanized Steel Rope	4,8 mm	Double Safety Steel with Indicator	To be indicated on the order	✓	✓	6.700 g

ARES SRL- 3 S

Retractable Fall Arrester

- * Aluminum alloy 360° rotating swivel anchor eye.
- * Compact lightweight design.
- * Impact resistant, thermoplastic outer body.
- * The spring-loaded rubber chamber prevents locking when it retracts.
- * Integrated shock absorber reduces the force on the load to less than 6 kN.
- * Double safety carabiner with indicator feature.
- * Ø 4.8 mm thick galvanized steel rope.
- * 140 kg working capacity.
- * 3 meters working length.




Ordering Information

Order Code	Product Details		Specifications						Standard		Weight (Gr/Pcs)
	Product Name	Product Type	Length	Material	Rope Dia(Ø)	Carabiner	Anchor Carabiner	EN360	CNB/ P/11.060		
ASRL03S	ARES SRL- 3 S	Retractable Fall Arrester	3 m	Galvanized Steel Rope	4,8 mm	Double Safety Steel with Indicator	To be indicated on the order	✓			2.450 g

ARES SRL- 6 SH

Retractable Fall Arrester

- * Aluminum alloy 360° rotating swivel anchor eye.
- * Compact lightweight design.
- * Impact resistant, thermoplastic outer body.
- * User-friendly carrying handle.
- * The spring-loaded rubber chamber prevents locking when it retracts.
- * Integrated shock absorber reduces the force on the load to less than 6 kN.
- * Double safety carabiner with indicator feature.
- * Ø 4.8 mm thick galvanized steel rope.
- * 140 kg working capacity.
- * 6 meters working length.



Ordering Information

Order Code	Product Details		Specifications						Standard		Weight (Gr/Pcs)
	Product Name	Product Type	Length	Material	Rope Dia(Ø)	Carabiner	Anchor Carabiner	EN360	CNB/ P/11.060		
ASRL06SH	ARES SRL- 6 SH	Retractable Fall Arrester	6 m	Galvanized Steel Rope	4,8 mm	Double Safety Steel with Indicator	To be indicated on the order	✓			3.650 g

ARES SRL- 10 SH

Retractable Fall Arrester

- * Aluminum alloy 360° rotating swivel anchor eye.
- * Compact lightweight design.
- * Impact resistant, thermoplastic outer body.
- * User-friendly carrying handle.
- * The spring-loaded rubber chamber prevents locking when it retracts.
- * Integrated shock absorber reduces the force on the load to less than 6 kN.
- * Double safety carabiner with indicator feature.
- * Ø 4.8 mm thick galvanized steel rope.
- * 140 kg working capacity.
- * 10 meters working length.



Ordering Information

Order Code	Product Details		Specifications					Standard		Weight
	Product Name	Product Type	Length	Material	Rope Dia(Ø)	Carabiner	Anchor Carabiner	EN360	CNB/P/11.060	(Gr/Pcs)
ASRL10SH	ARES SRL- 10 SH	Retractable Fall Arrester	10 m	Galvanized Steel Rope	4,8 mm	Double Safety Steel with Indicator	To be indicated on the order	✓		4.400 g

ARES SRL- 20 SH

Retractable Fall Arrester

- * Aluminum alloy 360° rotating swivel anchor eye.
- * Compact lightweight design.
- * Impact resistant, thermoplastic outer body.
- * User-friendly carrying handle.
- * The spring-loaded rubber chamber prevents locking when it retracts.
- * Integrated shock absorber reduces the force on the load to less than 6 kN.
- * Double safety carabiner with indicator feature.
- * Ø 4.8 mm thick galvanized steel rope.
- * 140 kg working capacity.
- * 20 meters working length.



Ordering Information

Order Code	Product Details		Specifications					Standard		Weight
	Product Name	Product Type	Length	Material	Rope Dia(Ø)	Carabiner	Anchor Carabiner	EN360	CNB/P/11.060	(Gr/Pcs)
ASRL20SH	ARES SRL- 20 SH	Retractable Fall Arrester	20 m	Galvanized Steel Rope	4,8 mm	Double Safety Steel with Indicator	To be indicated on the order	✓		9.100 g



REScue AND DESCENDING DEVICES WITH STEERING



ARGA[®]
SAFETY

The Safest
Way of
Working at Height

 argasafety.com

R550

Rescue and Descending Device (With Steering)

**Technical Specifications**

- * 3M™ DBI-SALA® Rollgliss™ R550 controlled descent device is used in controlled descent, rescue, and evacuation operations.
- * This fully automatic device has a descent speed of 0.6-0.9 m per second.
- * Provides rescue and evacuation up to a height of 140 kg to 500 m for one user or 282 kg to 175 m for two users.
- * Its unique bi-directional design ensures that one end of the lifeline goes down while the other end rises, ready for another rescue operation.
- * Provides emergency rescue and evacuation from different work areas.
- * Fully automatic controlled descent and two-way design allow multiple rescues.
- * It has internal rescue (lifting) steering.
- * It provides up and/or down movement control with the help of the steering wheel and the opportunity to use it with a drill for faster work.
- * Specially produced 9.5 mm thick static rope that complies with EN 1891 standard.
- * It has a compact, lightweight, and high-strength corrosion-resistant structure.
- * Integrated rope ears and double brake system for rope control.
- * i-Safe™ label system.
- * It is produced in special lengths of 0 – 130 meters.

Ordering Information

Order Code	Product Details		(Length (m))	Standard		Weight (Kg/ Pcs)
	Model	Description		EN 341	EN 1496	
3329030	R550	Rescue and Descending Device (With Steering)	30 m	✓	✓	4,59 kg
3329040	R550	Rescue and Descending Device (With Steering)	40 m	✓	✓	5,16 kg
3329050	R550	Rescue and Descending Device (With Steering)	50 m	✓	✓	5,73 kg
3329130	R550	Rescue and Descending Device (With Steering)	130 m	✓	✓	10,29 kg

R500

Rescue Device

**Technical Specifications**

- * 3M Rollgliss® 550 allows personnel suspended at height to be lowered as quickly as possible.
- * 3M Rollgliss® 550 allows personnel suspended at height to be lowered as quickly as possible.
- * Its unique bi-directional design ensures that one end of the lifeline goes down while the other end rises, ready for another rescue operation.
- * Provides emergency rescue and evacuation from different work areas.
- * Fully automatic controlled descent and Two-way design allows multiple rescues.
- * Specially produced 9.5 mm thick static rope that complies with EN 1891 standard.
- * It has a height of 500 m for one user and 175 m for two users.
- * Compact and lightweight design, high strength corrosion resistant structure.
- * Integrated rope ears and double brake system for rope control.
- * i-Safe™ label system.

Ordering Information

Order Code	Product Details		Length (m)	Standard		Weight (Kg/ Pcs)
	Model	Description		EN 341	EN 1496	
3328010	R500	Rescue and Descending Device	10 m	✓		2,84 kg
3328020	R500	Rescue and Descending Device	20 m	✓		3,41 kg
3328030	R500	Rescue and Descending Device	30 m	✓		3,98 kg
3328040	R500	Rescue and Descending Device	40 m	✓		4,55 kg
3328050	R500	Rescue and Descending Device	50 m	✓		5,12 kg





HELMETS



ARGA
SAFETY

The Safest
Way of
Working at Height

argasafety.com

AQA

Working at Height Helmet

**Technical Specifications**

- * Special design for use in working at height, search and rescue and industrial areas.
- * Washable feature thanks to high quality comfort pads with sweat absorbent properties.
- * ABS outer body.
- * Suspension system.
- * Ventilation channels designed for air flow, 6 on the sides and 4 at the back.
- * Quick-attachable headphone sockets.
- * Chin strap that can be put on and taken off with one hand thanks to the neodymium magnetic buckle.
- * Headlamp clip.
- * It has a borderless design to provide the user with a clear upward view.
- * Adjustable size range between 51/62 cm.
- * EN 12492 Standard.

Ordering Information

Order Code	Product Details		Color	Chin Strap	Standard		Weight (Gr/Pcs)
	Product Name	Product Description			EN397	EN 12492	
H000010	AQA	Working at Height Helmet	Red	✓		✓	480 g
H000011	AQA	Working at Height Helmet	White	✓		✓	480 g
H000012	AQA	Working at Height Helmet	Blue	✓		✓	480 g
H000013	AQA	Working at Height Helmet	Yellow	✓		✓	480 g

ACTA

Working at Height Helmet



Technical Specifications

- * Special design for use in working at height, search and rescue and industrial areas.
- * It has safe, comfortable head protection for working at heights and other hazardous industrial jobs.
- * ABS outer body.
- * Suspension system.
- * 4-point chin strap.
- * 6 ventilation channels.
- * Automatic adjustable headband.
- * 6-point textile internal structure.
- * Headphone jack compatible with all headphones.
- * A visor can be attached.
- * EN 397+A1 Standard.

Ordering Information

Order Code	Product Details		Color	Chin Strap	Standard		Weight Gr/Pcs)
	Product Name	Product Description			EN397 + A1	EN 12492	
H000020	ACTA	Working at Height Helmet	Red	✓	✓		434 g
H000021	ACTA	Working at Height Helmet	White	✓	✓		434 g
H000022	ACTA	Working at Height Helmet	Blue	✓	✓		434 g
H000023	ACTA	Working at Height Helmet	Yellow	✓	✓		434 g





PULLEYS



ARGA
SAFETY

 argasafety.com

JP-25

Pulley with lock (Jumar)

- * Enables the load to be pulled up safely.
- * Thanks to the locking mechanism on the system, the carrying rope remains stable and does not slip even if the load is released. This feature prevents the load from falling down.
- * Made of aluminum material.
- * Working range with rope dia Ø 8- 13 mm.
- * It has a carrying capacity of 25 kN


[Learn more](#)


Ordering Information

Order Code	Product Details		Strength	Rope Working Range	Standard	Weight (Gr / Pcs)
	Model	Product Name				
PJ00010	JP-25	Pulley with lock	25 kN	Ø 8 – 13 mm	EN 12278	398 g

TP-30

Tandem Pulley

- * Provides fast and safe working opportunity on the rope.
- * It has a ball bearing system; it works balanced on the rope with 2 bearings.
- * Body is made of aluminum material.
- * Working range with textile rope Ø 8- 13 mm.
- * Working range with steel rope Ø 8-12 mm.
- * Carrying capacity of 25 kN.


[Learn more](#)


Ordering Information

Order Code	Product Details		Strength	Textile Rope Working Range	Steel Rope Working Range	Standard	Weight (Gr / Pcs)
	Model	Product Name					
PT00020	TP-30	Tandem Pulley	20 kN	Ø 8 – 13 mm	Ø 8 – 12 mm	EN 12278	291 g



ARGA[®] SAFETY The Safest Way of Working at Height  argasafety.com

PATRON 11

Static Rope

The high strength and low risk of tearing of the Patron static ropes make them the right choice for different applications. The twisted 32-strand braided cover provides high dirt resistance, better grip, and high abrasion protection.

- * Light weight.
- * High breaking strength.
- * Easy to tie knots.
- * Excellent grip and handling.

Inside: Polyamide

Cover: Polyamide

Knitting: 32



Standart: EN 1891:2078 Tip A



Ordering Information

Order Code	Product Details		Length (m)	Material	Min. Breaking Strength Length [daN]	Cover (%)	Standard	Weight (Gr/mt)
	Product Name	Description						
SA11000	PATRON 11	Static Rope Ø 11 mm	To be indicate on the order	Polyamide	3.300	35	EN 1891 Tip A	75 g/m

ACTOR 11

Static Rope

The high strength and low risk of tearing of the Actor static ropes make them the right choice for different applications. The twisted 48-strand braided cover provides high dirt resistance, better grip, and high abrasion protection.

- * Light weight.
- * High breaking strength.
- * Easy to tie knots.
- * Excellent grip and handling.

Inside: Polyamide

Cover: Polyamide

Knitting: 48



Standart: EN 1891:2078 Tip A



Ordering Information

Order Code	Product Details		Length (m)	Material	Min. Breaking Strength Length [daN]	Cover (%)	Standard	Weight (Gr/mt)
	Product Name	Description						
SA11000	ACTOR 11	Static Rope Ø 11 mm	To be indicate on the order	Polyamide	3.150	35	EN 1891 Tip A	78 g/m

PATRON 12

Static Rope

The high strength and low risk of tearing of the Patron static ropes make them the right choice for different applications. The twisted 32-strand braided cover provides high dirt resistance, better grip, and high abrasion protection.

- * Light weight.
- * High breaking strength.
- * Easy to tie knots.
- * Excellent grip and handling.

Inside: Polyamide

Cover: Polyamide

Knitting: 32



Standart: EN 1891:2078 Tip A



Ordering Information

Order Code	Product Details			Length (m)	Material	Min. Breaking Strength Length [daN]	Cover (%)	Standard	Weight (Gr/mt)
	Product Name	Description	Length (m)						
SP12000	PATRON 12	Static Rope Ø 11 mm	To be indicate on the order		Polyamide	3.800	36	EN 1891 Tip A	92,30 g/m

ACTOR 12

Static Rope

The high strength and low risk of tearing of the Actor static ropes make them the right choice for different applications. The twisted 48-strand braided cover provides high dirt resistance, better grip, and high abrasion protection.

- * Light weight.
- * High breaking strength.
- * Easy to tie knots.
- * Excellent grip and handling.

Inside: Polyamide

Cover: Polyamide

Knitting: 48



Standart: EN 1891:2078 Tip A



Ordering Information

Order Code	Product Details			Length (mm)	Material	Min. Breaking Strength Length [daN]	Cover (%)	Standard	Weight (Gr/mt)
	Product Name	Description	Length (mm)						
SA12000	ACTOR 12	Static Rope Ø 12 mm	To be indicate on the order		Polyamide	3.400	35	EN 1891 Tip A	92 g/m



BAGS AND
ACCESSORIES



ARGA[®] SAFETY The Safest
Way of
Working at Height

argasafety.com

MOBI

Radio – Phone Carrier



1. Fastening pins to harness.



2. Adjustable rubber according to phone/radio size.



Ordering Information

Order Code	Weight (Gr/Pcs)
MB10100	77 g



CARRIER 1,4

Mini Tool Bag 1,4 lt



1. 2 hanger eyes on top.



2. Drawstring mouth to prevent material from falling.



3. High-strength waterproof fabric for intensive use.



Ordering Information

Order Code	Dimensions			Weight (Gr/Pcs)
	Length (mm)	Dia (mm)	Capacity (lt)	
C000001	120 mm	150 mm	1,4 lt	75 g

CARRIER 5

Tool Bag 5 lt



1. 4 hanger eyes on top.



2. Drawstring mouth to prevent material from falling.



3. The upper and lower parts of the bag are surrounded by 360-degree webbing, the shape of the bag is not distorted.



4. High-strength waterproof fabric for intensive use.



5. 1 hanger compartment under the bag.




Learn more



Watch the
overview

Ordering Information

Order Code	Dimensions			Weight (Gr/Pcs)
	Length (mm)	Dia (mm)	Capacity (lt)	
C000005	280 mm	180 mm	5,0 lt	155 g

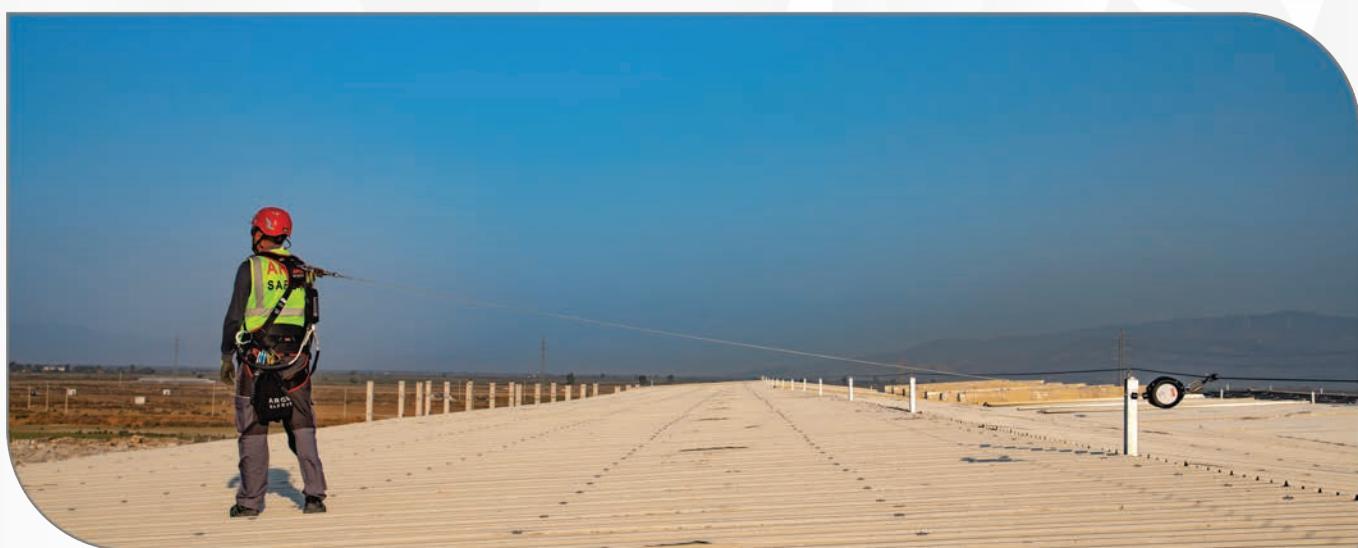

CARRIER 22

KKD Carrying Bag 22 lt



1. Drawstring mouth and closed lid to prevent material from falling.



2. 2 padded shoulder straps for carrying on the back.



3. High-strength waterproof fabric for intensive use.



Ordering Information

Order Code	Dimensions			Weight (Gr/Pcs)
	Length (mm)	Dia (mm)	Capacity (lt)	
C000005	470 mm	260 mm	22 lt	460 g

CARRIER 55

KKD Carrying Bag 55 lt



1. Wide zippered mouth that allows materials to be easily placed inside the bag.



2. Special compartment with zipper lock for shoes.



3. High-strength waterproof fabric for intensive use.



Ordering Information

Order Code	Dimensions			Weight (Gr/Pcs)
	Length (mm)	Dia (mm)	Capacity (lt)	
C000005	780 mm	300 mm	22 lt	955 g



ARGA® The Safest
S A F E T Y Way of
Working at Height





ARGA[®] The Safest
Way of
Working at Height
SAFETY



2025 - 2026

argasafety.com



HEAD OFFICE

⌂ Tuna Mah. 5500/3 Sokak Irmak Plaza No:2 P.K.:35090 Çamdibi, Bornova/İZMİR

📞 +90 232 469 69 39

✉ satis@argasafety.com

✉ export@argasafety.com

TECHNICAL TEXTILE PRODUCTION FACILITY

⌂ Tuna Mah. 5500/3 Sokak Irmak Plaza No:2 P.K.:35090 Çamdibi, Bornova/İZMİR

📞 +90 232 469 69 39

✉ info@argasafety.com